

ADEMCO

Vista-10 RF-Attack Pack

V10PRFATPKKT

- Includes:
 - * Vista-10P control
 - * 6150RF wireless ready keypad
 - * (2) 5816 wireless door/window transmitters
 - * 5890PI wireless PIR
 - * Wave2 2-tone siren
 - * 12V, 4Ah battery

Honeywell

ADEMCO

Wireless Ready Kits

V10P-50RFKT
V10PRF5804

- Includes:
 - * 5804 4-button wireless key
 - (V10PRF/5804 only)
 - * 6150RF wireless ready keypad



Honeywell

HAI Promo16

OmniPro II Security & Automation System

2H-20A002

- UPB lighting interface included
- Ethernet proof
- Telephone control
- UL Listed



ADEMCO

Vista Plus Series RF Prebox Pack

V15PWRLSPK1

- Kit includes:
 - * Vista-15P control
 - * 6150RF Fixed English keypad
 - * Aurora motion
 - * Wave2 siren
 - * 12V, 4Ah battery
 - * 620 jack & 621 cord



Honeywell

ADEMCO

Vista Plus Series RF Prebox Pack

V15PWRLSPK2

- Kit includes:
 - * Vista-15P control
 - * 6150RF Fixed English keypad
 - * Aurora motion
 - * (3) 5816WMWH window transmitters
 - * 5890PI Pet immune PIR
 - * Wave2 siren
 - * 12V, 4Ah battery
 - * 620 jack & 621 cord



Honeywell

ADEMCO

Vista Plus Series Voice Consists of Kits

V15P50VATKT
V15P60VATKT
V20P50VATKT
V20P60VATKT

- Kit includes:
 - * Vista-15P or Vista-20P control
 - * 6150V or 6160V voice keypad
 - * 12V, 4Ah battery
 - * Aurora motion
 - * Wave2 siren
 - * 620 jack & 621 cord



Honeywell

ADEMCO

PLUS Series Attack Packs

V15PACK (Boxed) or
V15P-ATPK/50 (Consists of Kit)
V20PACK (Boxed) or
V20P-ATPK/50 (Consists of Kit)

- Includes:
 - * Vista-15P or Vista-20P Control
 - * 6150 keypad * Wave2 2-tone siren
 - * 12V, 4 Ah battery * Aurora PIR
 - * RJ31X telephone jack & cord*
 - (V15PACK & V20PACK only)

V10PACKP

- Includes:
 - * Vista-10P
 - * 6148 keypad
 - * Aurora PIR
 - * RJ31X telephone jack & cord
 - * Wave2 2-tone siren



Honeywell

ADEMCO NEW PLUS SERIES Control Panels

VISTA-10P

- 6 standard hardwired zones
- 16 wireless expansion zones
- 22 total zones
- 8 independant keyfobs zones
- 16 users
- 32 event log

VISTA-15P

- 6 standard hardwired zones
- 16 hardwired expansion zones
- 26 wireless expansion zones
- 32 total zones
- 8 independant keyfobs zones
- 32 users
- 50 event log
- Graphic keypad support

VISTA-20P

- 8 standard hardwired zones (zone doubled to 15)
- 40 hardwire expansion zones
- 48 wireless expansion zones
- 2 "True Partitions"
- 16 wireless keyfobs zones
- 48 users
- 100 event log
- Graphic keypad support

All PLUS SERIES Panels Include

- 3 Single button operation for:
 - Arming • Panics • Time/Date Display
 - Lights On/Off • Page • Test
- 3 2 On-board triggers 3 Keypad Macros
- 3 Dynamic Zone type 3 Battery saver
- 3 Scheduling options:
 - User access • Auto arm/disarm
 - Latchkey exception reporting
 - Device activation

6150RF COMPATIBLE!

Honeywell

ADEMCO VISTA-40

Universal Control/Communicator

VISTA-40

- Features:
 - * 2 partitions standard
 - * Supports 5800 wireless
 - * 8 relay output control
 - * 4286 voice access/phone control
- X-10 compatible -100 event log



Honeywell

ADEMCO

Vista-50P Power Pak2

V50P-PAK2

- 86 zones, 8 partitions
- Wireless, hardwired & multiplex
- Pack includes:
 - * 6160 Alpha keypad
 - * Vista-50P partition control/communicator



Also available: Vista-50P & Vista-50PUL

6150RF COMPATIBLE!



Honeywell

FBII 8-72 Zone Control FB-XL4

- Wired or multiplex expansion
- 8 partitions 64 user codes
- 8 On-board triggers & up to 40 relays
- Auto-arming by partition
- Includes 16.5V 40VA transformer



UL Honeywell

FBII Attack Pak FB-XL2T-ATPK

- FB-XL2T control in new small cabinet
- FB-XL4600SM keypad
- FB-ZR815 15W speaker
- 998PI PIR motion sensor
- 12V 20VA transformer
- 12V 4Ah battery



UL Honeywell

FBII 7-Zone Control Panels FB-XL2TSM

- 76 event log
- Auto-Arming
- 2 on-board trigger outputs
- 15 user codes, paging
- Includes 12V 20VA transformer & LED keypad
- Compatible keypads (FB-XL4600SM, FB-XK406, FB-XK5LC and FB-XK7LC)



Honeywell

FBII 8-128 Zone Control Panel FB-XL5LT

- Wired or multiplex expansion
- 8 partitions
- 128 user codes
- 8 on-board triggers and up to 40 relays
- Auto-arming by partition



Honeywell

IntelliSense Security Control Panel Kit CK-SK236EP

- 6 zones
- System 236EP control
- 236 LED plus keypad
- 1097-B transformer
- 5 year warranty



UL Honeywell

Apex Destiny-6100 Hardwire/Wireless Control XP-DEST6100

- 16-zone, expandable to 96 hardwire/wireless or combo
- 56 channels of automated X-10 with dimming
- Integrated local and remote phone access
- Compatible with Ademco 5800 wireless series



Honeywell

FBII NEW OMNI SERIES Attack Packs FB-408ATPK

- Kit includes:
- * OMNI408 control
- * XK108 LED keypad
- * 747 sounder
- * IS215T motion
- * 12V, 4aH battery
- * 620 jack & 621 cord



FB-624ATPK

- Kit includes:
- * OMNI624EU control
- * OMNIKPUS Fixed English keypad
- * 747 sounder
- * IS215T motion
- * 12V, 4aH battery
- * 620 jack & 621 cord



FB-848ATPK

- Kit includes:
- * OMNI848EU control
- * OMNILCDUS Custom Alpha keypad
- * 747 sounder
- * IS215T motion
- * 12V, 4aH battery
- * 620 jack & 621 cord



UL Honeywell

ADEMCO Commercial Burg Control VISTA-128BP

- 128 zones/partitions
- 150 user codes
- 250 card holders/8 access doors
- Supports facility automation and alpha numeric paging using VA8201
- Supports panel-linking using VA8200
- Supports commercial UL wireless



Honeywell

ADEMCO Commercial Burg Control VISTA-250BP

- 250 zones/partitions
- 250 user codes
- 500 card holders/15 access doors
- Supports facility automation and alpha numeric paging using VA8201
- Supports panel-linking using VA8200
- Supports commercial UL wireless



Honeywell

ADEMCO Vista 128BP Consist of Kit V128BP-KT1

- 128 zones, 8 partitions
- Includes: Vista-128BP
(1) 6160 white keypad, annunciator
- Supports panel linking using VA8200
- Supports RS-232 for facility/home automation using VA8201
- Supports commercial wireless



UL **Honeywell**

ADEMCO Output Devices

Relay Module 4204

- 4 programmable Form C relays
- Applications include:
sounder, strobe or interface with other devices

Wired Zone Expanders

- 4219**
 - Adds 8 hardwired supervised zones
 - 30mA draw
- 4229**
 - Adds 8 hardwired supervised zones
 - 2 relay outputs
 - 2A max. at 28VDC/AC



Honeywell

ADEMCO Vista 250BP Consist of Kit V250BP-KT1

- 250 zones, 8 partitions
- Includes: Vista-250BP
(1) 6160 white keypad, annunciator
- Supports panel linking using VA8200
- Supports RS-232 for facility/home automation using VA8201
- Supports commercial wireless



UL **Honeywell**

HAI Web Link II 2H-1108

- Allows access & control of any Omni system over the internet
- For Windows
- Check on house with video surveillance
- Receive e-mail notifications
- Record video of events
- Check & adjust lights, temperature, security over internet



UL **HAI**

GE Security Kit CA-NX6KIT

- 6 to 12 hardwire zones
- Wireless expansion to 16 zones
- 2 partitions
- 40 user codes
- 185 event log
- Telephone line monitor
- Includes LED keypad & transformer
- Accepts NetworX modules



UL **GE**

GE Security Kit CA-NX8KIT

- 8 - 48 hardwire/wireless zones
- 8 partitions
- 99 user codes
- 512 event log
- 1 Amp aux power
- Includes LED keypad & transformer
- Accepts NetworX modules



UL **GE**

HAI OmniLT & Console Promo 9 Automation Controller System 2H-PROMO9

- Security & Automation
- Built-in phone, serial I/F
- 8 zones, expandable to 24
- 2 thermostats, 16 lights
- Contact ID 2-wire smoke



UL **HAI**

GE Security 8-192 Zone Control CA-NX8E

- 8 to 192 hardwire/wireless zones
- 8 true partitions
- 240 user codes
- 512 event buffer
- 2 amp power supply
- Accepts all NetworX modules



UL **GE**

GE Security Kit CA-NX848KIT

- 8 to 48 hardwire/wireless zones
- 8 partitions
- 99 user codes
- Telephone line monitor
- 1 Amp aux power
- Includes LED keypad & transformer
- Accepts NetworX modules



UL **GE**

HAI OmniPro II for Structured Wiring Kit 2H-PROMO15S

- Award-winning security/automation controller, 32 expandable to 176 zones
- Snaps into most structured wiring enclosures
- Built-in telephone, Ethernet port, 3 serial ports
- Controller, flush LCD, RC-80 thermostat, outdoor sensor, 16-zone expander
- UL Listed, contact ID, 2-wire smoke



UL **HAI**

HAI Promo16 OmniPro II Starter Kit 2H-PROMO16

- OmniPro II controller with enclosure
- Surface mount console, flush mount kit
- RC-80B thermostat, indoor/outdoor temp sensor
- UPB-PIM, RJ-31X cord & jack, serial cable
- 1105W dealer software



UL **HAI**

HAI Omni II for Structured Wiring Kit with Flush Console 2H-PROMO12S

- UL Listed security with 16 zones expandable to 48
- Includes:
 - * Omni II Controller on structures wiring back plate
 - * Surface mount console with flush mount kit
 - * RC-80B thermostat & in/outdoor temp sensor
 - * Powerline transceiver, connector kit and instructions



UL **HAI**

HAI OmniLT for Structured Wiring Kit 2H-PROMO10S

- Award-winning security/automation controller, 8 expandable to 24 zones
- Snaps or screws into most structured wiring enclosures
- Built-in telephone, serial ports
- Controller, flush LCD, RC-80 thermostat, outdoor sensor
- UL Listed, contact ID, 2-wire smoke



UL **HAI**

**USP
Mini Controller**
US-MC6A

- 4 protective circuits plus panic
- Adjustable exit/entry with fail-safe arming
- Regulated power supply/recharger
- Arm, loop status alarm memory LED
- Alarm & dry contacts fuseds



**ADEMCO
V-Plex Overhead Contact**
4959SN

- Epoxy sealed
- 2" standard gap
- Serial # controls
- Programmed from Vista keypad



**ADEMCO
V-Plex 2-Point
Remote Addressable Module**
4190SN

- Serial number device only
- Selection for EOLR zone
- Tampered cover
- Can be used on Vista-32FB, Vista-128FB or Vista-128B for commercial fire and security applications



Also available: 4190WH
• Dip switch version



**Mask Systems, Inc.
D300 Series
Multiplexer Signal Modules**
D6-D300 Series

- Supervised burg or fire inputs
- Signals one way or two ways
- Multiplex up to 24 circuits on one pair of wires (4 modules)
- Each transmitter signals its associated receiver
- UL & CSFM listed




**ADEMCO
Universal Class A/Class B
Interface Module**
4208SNF

- 2 Class "A" supervised zones
- 6 Class "B" supervised zones
- Works on V-Plex loop or as separate conventional loop
- Programmable for fast response



**ADEMCO
Addressable
Surface Mount Contact**
4945SN-WH

- Snap-on cover conceals mounting screws
- 3/4" standard gap
- 5' CL II jacket cable
- Programmed from Vista keypad



**ADEMCO
Panel Linking Module**
VA8200

- Allows up to 8 Vista-128BP or Vista-250BP panels to be linked together
- Control multiple zones, partitions or even buildings from 1 central station
- Easy connection to the control panel via ECP bus



**ADEMCO Micro-Miniature
V-Plex Interface Devices**
4193SN (2-zone)

- Makes any hardwire device V-Plex compatible
- Supports commercial burg/fire applications
- Built-in serial number
- CSFM and UL approved/listed




Also available: 4293SN
• 1-zone




**ADEMCO
Recessed 3/8" V-Plex Contact**
4944SN-WH

- 3/8" diameter size
- For serial # controls
- 3/4" standard gap




**ADEMCO
V-Plex Single Output Relay Module**
4101SN

- Form "C" relay
- 1 Class "B" supervised input zone
- Mounted in tamper resistant case
- Suitable for commercial fire & burg applications



**ADEMCO
V-Plex Surface Contact**
4939SN-WH
4939SN-BR
4939SN-GY

- For select serial # controls
- 1.25" standard gap

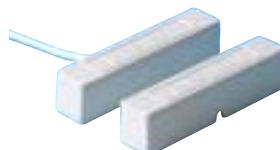

**ADEMCO
V-Plex Recessed Contact
with Serial #ID**
4191SN-WH

- Standard gap: 7/8"
- 1/2" diameter case
- Built-in RPM (Remote Point Module)
- Also available with steel door adapter



ADEMCO V-Plex PIR 998MX

- 50' x 50' coverage
- DIP switch or serial number addressing
- Look down zone
- Wide angle, pet alley & long range lenses included



UL Honeywell

ADEMCO V-Plex Mirror PIR 4275EX

- 35' x 45' coverage
- Tamper & Alarm memory
- Wide angle and long range mirror included
- Built-in RPM for 2-wire installation w/point ID



Also available: 4275EX-SN
• Serial number addressing

UL Honeywell

ADEMCO V-Plex DUAL TEC QUEST2260SN

- 60' x 75' coverage
- Serial number addressable
- Accu-Trak walk test
- Environmental adaptation
- Fluorescent light filter
- Microwave & PIR supervision



UL Honeywell

ADEMCO Quad Mirror PIR 4278EX

- 40' x 40' coverage
- Built-in RPM for 2-wire polling loop (up to 63 pts.)
- Wide angle and long range mirror included
- Tamper



Also available: 4278EX-SN
• Serial number addressing

UL Honeywell

ADEMCO V-Plex Isolation & Extender Module 4297

- Double multiplex loop distance
- Built-in isolator to separate devices or loops



Honeywell

ADEMCO V-Plex Interface Module 4208U

- EOLR supervised
- 8 Class B loops
- 6 normal responses
- 2 fast/normal responses
- Use on any V-Plex compatible control



Honeywell

FBII Multiplex Devices FB-XL4722

- PIR motion detector
- Connects directly to XL4/5 via 2-wire multiplex bus
- Dual element PIR, pulse count, DIP switch programming



Honeywell

ADEMCO V-Plex Glassbreak Detector CK-FG1625SN

- FlexCore™ Technology
- 25 ft. range
- Serial number addressable
- Adjustable sensitivity
- 6 year warranty



UL Honeywell

ADEMCO V-Plex Group Zoning Module 4209U

- Supports up to 64 2-wire smoke detectors
- 2 or 4 loop selectable
- Supports either DIP switch or serial number applications
- Can be attached remotely or at the panel



Honeywell

FBII Expansion Module FB-7126

- Multiple expansion board for XL5
- Supports dual 2-wire bus
- Lapable of up to 120 multiplex zones



Honeywell

ADEMCO Phone Module 4286

- Remotely controls system from any touch tone phone, worldwide
- Voice output through phone or optional speaker
- Controls lights & HVAC with proper peripherals



Honeywell

GE Security PinPoint Addressable Sensor Interface CA-NX2192E

- Supports up to 192 addressable points
- 3 addressable loops
- Up to 2 mile wire run per loop
- Compatible with NX-8ECF, NX-8CF, NX-8E and NX-8 panels



FBII Multiplex Device FB-XL4702

- Single Point Module
- Connects directly to XL4/5 via 2-wire multiplex b
- Requires FBII's FB-ZR700P Multiplex Programmer



Honeywell

GE Security Addressable PIR CA-AP750-ID

- Addressable PIR for PinPoint Module
- Adaptive signal processing
- 4 separate curtain coverage patterns
- Flat wall or corner mounting



GE Security Addressable Shatterpro Glassbreak CA-5845ID

- Addressable Shatterpro glassbreak for use with the NX-2192E for PinPoint Module



**GE Security
Addressable
Single Input Device
SR-SIID**

- Addressable single input device for use with NX-2192E PinPoint Module


**GE Security
Addressable
4-Input/4-Output Device
CA-4140I-ID**

- Addressable 4-input/4-output interface for use with the NX-2192E PinPoint Interface Module


**GE Security
NetworkX LCD Keypad
CA-1192E**

- Custom English language
- Euro design
- Alphanumeric library
- Adjustable backlighting
- Adjustable sounder
- Detachable door design


**GE Security
LCD Keypad
CA-NX148E**

- Custom English language
- Large back-lit display
- Real time clock
- Alphanumeric library
- Downloadable
- Adjustable backlighting
- Adjustable sounder
- Detachable door design


**GE Security
Programmable LCD Keypad with
Integrated 48-Zone Wireless Receiver
CA-NX148ERF**

- Integrated 48-zone wireless receiver
- Custom English language
- Large backlit display
- Alphanumeric library
- Adjustable backlighting
- Adjustable sounder
- Detachable door design


**ADEMCO
LCD Fixed English Keypad
6148**

- LCD fixed English display
- Compact
- Backlit keys
- Addressable
- Built-in piezo sounder


Honeywell
**ADEMCO
Deluxe Keypad
6150**

- Large, illuminated, fixed English display
- Soft-touch back-lit keys
- 4 programmable function keys, accessible even when door is closed
- Removable door - Sleek white design
- Piezo electric sounder
- Ideal for use w/VISTA-15


Honeywell
**ADEMCO
Deluxe Integrated Keypad/Receiver
6150RF**

- Breakthrough pricing; includes built-in
 - * 6150 keypad
 - * On-board relay
 - * 5800TM status transmitter
 - * 5881ENH 16-zone wireless receiver
- Compatible w/all 5800 wireless devices; supports encrypted operation of 5804E and 5804BDV 4-button wireless keys


Honeywell
**ADEMCO
Deluxe Keypad with Voice
6150V**

- Built-in Voice Response
- Built-in Message Center
- Large, illuminated, fixed display
- 4 programmable function keys
- Removable door - Sleek white design
- Piezo electric sounder
- Soft-touch back-lit keys


Honeywell
**ADEMCO
Premier Keypad
6160**

- Large, illuminated, 32 character, customizable alpha display
- Soft-touch back-lit keys
- 4 programmable function keys, accessible even when door is closed
- Removable door - Sleek white design
- Speaker beeps system status
- Ideal for use w/VISTA-15


Honeywell
**ADEMCO
Custom Alpha Integrated Keypad/Receiver
6160RF**

- 5828/5828V wireless keypads are compatible with VistaPlus controls through a 6160RF
- Includes built-in
 - * 5800TM status transmitter
 - * 5881ENH 16-zone wireless receiver
- Compatible with all 5800 wireless devices; supports encrypted operation of 5804E and 5804BDV


Honeywell
**ADEMCO
Premier Keypad with Voice
6160V**

- Built-in Voice Response
- Built-in Message Center
- 4 programmable function keys
- Speaker beeps system status
- Large, illuminated, 32 char., custom alpha display
- Removable door - Sleek white design
- Soft-touch back-lit keys


Honeywell
**FBII
8-Zone LED Keypad
FB-XK108**

- Separate LED's for zones and system status
- 8 zones
- Soft touch keys illuminate for greater visibility
- Compatible with FB-OMNI408, FB-OMNI624EU and FB-OMNI848EU controls
- Can be used to program mentioned controls


Honeywell
**FBII
OMNI Fixed English Keypad
FB-OMNIKUPUS**

- Fixed English LCD displays system status in easy to read plain English
- Soft-touch keys illuminate for greater visibility
- White removeable door blends in with any decor
- Compatible with FB-OMNI408, FB-OMNI624EU and FB-OMNI848EU controls
- Can be used to program above OMNI controls


Honeywell
**FBII
OMNI Custom Alpha Keypad
FB-OMNILCDUS**

- Large 32 character alpha LCD displays system status & zone information in plain English
- Soft-touch keys illuminate for greater visibility
- White removeable door blends in with any decor
- Compatible with FB-OMNI408, FB-OMNI624EU and FB-OMNI848EU controls
- Can be used to program above OMNI controls


Honeywell

Apex Hardwire LCD Keypad XP-6160AP

- Backlit display with 2 fully programmable function keys
- Single button arm/disarm
- 3 panic zones
- Compatible with Destiny XP-6100 Series



Honeywell

FBII LCD Keypad FB-XK5LC

- Large backlit LCD display used with FB-XL2T, FB-XL2PLT, FB-XL31 & XL4/5



FB-XK7LC

- Large backlit LCD display used with FB-XL2T, FB-XL2PLT, FB-XL31, XL4/5



Honeywell

ADEMCO Wireless Fixed English Keypad 5828

- No wires to run, lowering installation/labor cost
- Compatible with LYNX
- Compatible with VISTA using a 6160RF
- Desk mount (5828DM) or AC adapter for "Always On" operation
- Comes with 3 "AA" batteries



Honeywell

ADEMCO Wireless Fixed English Keypad with Voice 5828V

- Speaks systems status and zone information in plain English
- No wires to run, lowering installation/labor cost
- Compatible with LYNX
- Compatible with VISTA using a 6160RF
- Desk mount (5828DM) or AC adapter for "Always On" operation



Honeywell

ADEMCO Graphic Touchscreen Keypad 6270

- Intuitive graphical touchscreen display makes systems operation easier than ever with icons and menu driven prompts
- Helps reduce end user training cost & increases customer retention
- Compatible with all Vista Plus controls
- Family message center



Honeywell

ADEMCO Wireless English Keypad 5839

- No wires to run reducing installation & labor cost
- Compatible with LYNX & LXL
- Compatible with VISTA using 5883H
- Optional AC adapter for "Always On" operation
- Includes a 9V battery



Honeywell

ADEMCO Vista Plus Series Graphic Keypad Prebox Packs V20PWRLSPK

- Kit includes:
 - * Vista-20P control
 - * 6270 graphic Touchcenter keypad
 - * 5881ENM receiver
 - * 5816 window/door transmitter (3)
 - * 5890PI motion
 - * Wave2 siren
 - * 12V, 4aH battery
 - * 620 jack & 621 cord


- Kit includes:
 - * Vista-20P control
 - * 6270 graphic Touchcenter keypad
 - * Wave2 siren
 - * IS-2260 motion
 - * Wave2 siren
 - * 12V, 4aH battery
 - * 620 jack & 621 cord

V20P6270PK

Honeywell

Apex Hardwire LED Keypad XP-RK36

- 2 fully programmable function keys
- 3 panic zones
- Built-in speaker
- Single button arm/disarm
- Accepts XP-TWM25K XP-TWM25W microphones



Honeywell

FBII XK Series Keypads Deluxe Style LED Keypads

- FB-XK406
 - 6-zone LED keypad for FB-XL2T
- FB-XK508
 - 8-zone LED keypad for FB-XL2PLT
- FB-XK512
 - 12-zone LED keypad for FB-XL31



Honeywell

FBII SM Style Keypads

- FB-XL4600SM
 - 6 zone, LED keypad for FB-XL2T
- FB-XL4612SM
 - 12 zone, LED keypad for FB-XL31



Honeywell

IntelliSense Plus Keypads

- CK-236LED
 - 6 zone LED keypad with backlight
- CK-238LED
 - 8 zone LED keypad with backlight
- CK-ALPHAPI
 - LCD keypad, available in 6, 8 or 16 zone version



Honeywell

HAI Omni Console 2H-33A004

- Omni console with built-in speaker/microphone
- Cool blue LCD
- surface mount console
- Includes silk screen front, connector kit & instructions



HAI

GE Security 16-Zone Slimline LED Keypad for NX Controls CA-NX1516E

- 16 zone LED keypad
- Slimline design
- 3 emergency keys
- Backlit keys
- Dimensions: 3.1" W x 5.8" H x 1.3" D



GE

GE Security 8-Zone Slimline LED Keypad for NX Controls CA-NX1508E

- 8 zone LED keypad
- Slimline design
- 3 emergency keys
- Backlit keys
- Dimensions: 3.1" W x 5.8" H x 1.3" D



GE

**GE Security
NX Series LED Keypads**

CA-NX108E

- 8-zone keypad

CA-NX116E

- 16-zone keypad

CA-NX124E

- 24-zone keypad

CA-NX1308E

- 8-zone keypad with door

CA-NX1316E

- 16-zone keypad with door


**GE Security
PinPoint Interface Card**
CA-NX2192E


- Supports up to 192 addressable devices
- Up to a 2 mile loop
- Supports up to 3 loops
- Attaches to SR-NX8E panel


**GE Security
Expansion Modules**
CA-NX508E

- Output combined module

CA-NX534E

- 2-way voice module

- Includes speakers & microphones
- XID compatible
- Easy to install


**SECO-LARM®
On-Site Paging System**
SL-E35E

- Easily connects to sensors, panel, etc.

- Up to 1 mile range

- Up to 2 zones

- Page up to unlimited amount of pagers

SL-E35EV

- Same as SL-E35E but with vibrating pager

SL-E35E7

- Same as SL-E35EV but with 6 zones

SECO-LARM®


**HAI
OmniTouch Touchscreen**
2H-32A001

- Colorful interface for all HAI Omni systems
- Plug & Play - no programming required
- Control security, lights and temperature with one touch
- Most affordable touchscreen in its class
- Fast and responsive


**HAI
Omni Console (Keypad)
Surface Mount Console**
2H-33A001

- 48 character LCD screen
- Cool Blue backlight
- Menu driven set-up and operation
- For all HAI Omni systems
- Thin design, only 3/4"


**FBII
Trigger Cable Assembly**
FB-XL4612TC

- Provides connection for trigger outputs on FB-XL2PLT and FB-XL31

FB-7103UL

- Provides connection for trigger outputs on XL4/5

FB-XL2GTC

- Provides connection for trigger outputs on FB-XL20PK & FB-XL2T



Honeywell

**FBII
2-Point Module**
FB-XL4702

- Allows 2 conventional sensors to function on the XL4/5 multiplex bus



Honeywell

**FBII
Extender Module**
FB-XL4MXEXT

- Extends multiplex bus beyond normal 1220M limit
- For use with FBII's XL4/5



Honeywell

**ADEMCO
Communication
Interface Adaptor**
CIA


- Downloading modem for ADEMCO, FBII and Apex products
- Operates with ADEMCO Compass, V-Link software and FBII EZ-Mate
- External: connects to downloading computer serial port (cable not included)
- Transmission up to 2400 baud

Honeywell

**ADEMCO
Energy Saver Kit**
ESAVR-KT


- Includes:
 - * Set back thermostat
 - * Phone control module
- Interfaces with security system
- Controlled from any touch-tone phone
- **Saves energy costs!**

Honeywell

**FBII
Expansion Modules & Accessories**
FB-7120

- Multiple expansion board for XL4
- Supports 2-wire bus capable of up to 64 multiplex zones

FB-7105

- 8-zone wired expander for XL4/5



Honeywell

**ADEMCO
Alpha Pager Module**
VA8201


- Serial output for use with serial printer or home/facility automation controls
- Parallel printer output
- Alphanumeric paging via telocator alphanumeric protocol (tap)

Honeywell

**Apex
Control Accessories
Hardwire Expansion Board**
XP-HWB416


- 16-zone, multiplexed expansion board
- Up to 4 expansion boards per system
- Remote mount
- Shipped with mounting case

Honeywell

**Apex
Expansion Relay Board**
XP-EXP8


- 8 relay expansion board - up to 56 relays per system
- Relays controlled by
 - * event
 - * time of day
 - * user activity

Honeywell

Apex Internet Connection Module XP-ICM6100

- Compatible with Apex Destiny 6100
- Security, lighting & home control from any IP enabled interface
- Plug & Play - no programming required
- No master controller



Honeywell

E&E Electronic Eng. EFAR Module with DVC EE-EFAR100

NEW!

- Reduces false alarms by over 90%
- T-tap hookup - one wire p/zone
- Works with all loop supervision types (N/C, EOL, DEOL)
- Lightning block process, verified alarm output
- Auto configures, no programming or jumpers
- Digital Verification Control tech (DVC)
- Built-in wiring check on-board diagnostics



E&E

E&E Electronic DETMAX Multiple Detection Interface Module EE-EE778

- Compatible with most security & access control or as a stand alone use
- Detects non-activity, notifies user after preset time lapse
- Suitable for on-duty supervision, senior safety
- Energy saving application or CCTV control



E&E

Sure Action Inc. Marine Security System SU-MG44C

- Self-contained security system for boats
- 12 VDC operation with low current draw
- Accepts all N.O. devices and triggers lights/sirens
- Easy screw terminal connections to control panel
- Simple to use



SEE VIDEO AT www.adilink.com

USP Auto Voice Pager/Dialer US-AVD45B

- Momentary or continuous setting
- Normally open or normally closed setting
- Call 4 phone numbers/pages
- Multiple pauses



United Security Products, Inc.

USP Auto Voice Dialer with Verification US-AD2000

- Programmable number of times messages repeated to each number dialed
- EEPROM memory - line seizure
- 2-way voice verification allows the person to listen in
- 4" alarm message zones



Also available: US-AD2001

United Security Products, Inc.

Eagle Security Products Terminator Vox 2-Way Audio Module EG-301242

- Vox & manual control
- 3 mic zones with 2-wire microphones
- CS detect with auto disconnect
- Auto trip



EAGLE SECURITY PRODUCTS, INC.

Eagle Security Products Terminator Advantage™ 2-Way Audio Kit EG-301260C

- 8 microphone, speaker & relay zones
- Expandable to 48 zones
- 2.5A power supply
- Schools, large homes, commercial, industrial



EAGLE SECURITY PRODUCTS, INC.

Visonic 2-Ch. Programmable Voice Dialer VS-DL125C

- Calls 4 telephone numbers per channel
- Pager & cellular phone compatible
- 2 alarm inputs with separate voice messages



Visonic
For a smart and secure lifestyle

Eagle Security Prod. 1500 Programmable Relay Timer EG-301500

- Fourteen operation modes
- 2 inputs / 2 outputs
- AC or DC power
- Programmable
- One timer does it all



Also available: EG-302003
Programmer for 1500

EAGLE SECURITY PRODUCTS, INC.

Eagle Security Products Terminator™ 2-Way Voice Module EG-301250

- Auto-Trip function
- Three 2-wire mic zones
- Full time call back with dual access codes (EEPROM)
- Integrated siren driver



EAGLE SECURITY PRODUCTS, INC.

Stealth Laboratories 365 Day/24-Hour Timer YY-TM365

- 50 individually programmable daily or weekly events and 10 programmable holiday events
- Form C contacts rated 10A for Latching or Momentary Operation
- 9 volt battery backup
- Also available 60 sec./min. timer (YY-TM60)
- Lifetime warranty



STEALTH LABORATORIES

E&E Electronic E TIMER Digital Annual Timer EE-EE678T

NEW!

- PC programmable, 1 relay output
- Versatile 24 hr./365 day event memory back-up
- Holiday special setting selectable
- Auto compensation for daylight savings time
- Automatic access control timer, 50 year programmability



E&E

Altronix Annual Timer AX-AT4

- 4 individually programmable relay outputs
- Up to 254 daily events/1778 block events
- 254 Holiday/Special Exceptions
- Auto Compensation for Daylight Savings Time



Altronix®

Altronix Multi-Purpose Timer AX-6062

- 1 second momentary relay activation at the end of timing cycle (delay pulse)
- Quick & accurate time range (1 sec. to 60 min.)
- Contacts are rated 8A @ 120VAC/28VDC
- Pulse/flasher mode
- Lifetime warranty



Altronix®

DITEK Alarm Dialer Surge Protector DK-MRJ31XSCP

- Protects the alarm panel dialer from surges on the telephone line
- Provides both over-voltage and over-current protection for 1 phone line
- Modular RJ31X connection
- Resettable fusing & patch cord



ADEMCO Programmer 7720ULF

- UL 864
- Fire Communicator
- 7-zone fire control
- No phone line needed



Honeywell

ALARMNET LONG RANGE RADIO

The security industry's only nationwide communications service provider delivering a wide range of products and services for supervised alarm signal transport applications.



AlarmNet-A: Original AlarmNet



AlarmNet-C: Control Channel Cellular



AlarmNet-M: Mobitex System

Call AlarmNet for coverage in your area.

1-800-222-6525

ADEMCO MicroFAST Installation Tool 7715DF

- Easy to use
- Determines expected performance from 7720 & 7820 Series
- Alphanumeric LCD display for successful link, link direction, signal strength & channel #
- Can program one-way radios
- Rechargeable NiCad battery



Honeywell

ADEMCO Control Channel Cellular Subscriber Transceiver 7845CV2

- Low cost
- Full CID Reporting
- Reduces redundant signal traffic
- Built-in tamper-proof antenna
- Can be powered from compatible control panel



Available packs:
VISTACOM-KT1



Honeywell

ADEMCO Synthesized Subscriber Transmitter 7720PLUS

- ECP data or 4 zones
- Built-in LED indicators
- Built-in tamper protection
- Self-diagnosing with fault indication
- Reduces redundant signal traffic



Available packs:

7720PLUSPK

- Incl. transformer & battery



Honeywell

ADEMCO Internet Receiver 7810IR-ENT

- Internet or Private Network applications
- Compatible with all AlarmNet radios
- AlarmNet Network Control Center can route A, C or M service signals to the 7810IR/7810IR-ENT receivers
- Unlimited account capacity
- Easy Cat-5 connection to a hub or router
- Installs behind firewalls without compromising network security
- Programs via the touchscreen display
- 2-way authentication using 1,024-bit key encryption
- May be interfaced directly with the central station automation package



Honeywell

ADEMCO Zone Only Control Channel Cellular Subscriber Transceiver 7845CZ


- Low cost
- Full CID Reporting
- Reduces redundant signal traffic
- Built-in tamper-proof antenna
- Can be powered from compatible control panel
- 4" W x 6.5" H x 1.5" D



Honeywell

ADEMCO Subscriber Transmitter 7830R

- UL-AA (Line) supervision
- Universal compatibility
- 4 reporting zones



Available packs:

7830RPK Includes transformer & battery
VISTACOM-KT2

- Includes Vista-128BP control panel, 6160 keypad & 7830R Subscriber Transceiver



Honeywell

ADEMCO Synthesized Combination Fire Control & Long Range Radio Transmitter 7720ULFPLUS

- Allows direct connection to waterflow detectors, pull stations and supervisory switches
- Eliminates the need for phone lines



Available packs:

7720ULFKT-EX

7720ULFKT



Honeywell

ADEMCO Cellular Fire Radio 7845CF

- Back-up communications for fire applications
- Eliminates a dedicated phone line
- Reduces redundant signal traffic
- Built-in tamper-proof antenna
- 14.5" W x 12.5" H x 2.75" D
- 7845CFZ only:
 - * 6 supervised zones, 7 reporting zones
 - * 5 voltage trigger input zones
 - * 2 zones mapped to zone 1 input



Honeywell

ADEMCO Internet Communicator 7845i

- Internet or Private Network applications
- Plug-and-Play network setup
- Meets UL AA (High-Line Security)
- 4-wire connection to compatible ADEMCO control panels
- Reduces redundant signal traffic
- Highest level of data security using 1,024-bit key encryption
- Optional Advanced Encryption Standard FIPS 197 approved
- Remote Control ready via optional Symphony services
- Lighting & appliance control
- Full CID reporting
- Dimensions: 7.5" W x 6.5" H x 1.5" D



Honeywell

ADEMCO Security System Printer 6220S

- Event logging
- Dot matrix
- Uses standard adding machine paper
- Battery back-up available (6220BB)
- 2 replacement ribbons and 4 rolls paper available (6220RPR)



Honeywell

Uplink Digicell 1650 L3-1650KIT

NEW!

- Full data reporting
- Compatible with most security panels
- Cellemetry certified
- Dual alarm path
- Seven status LEDs



Uplink
A Security Systems Solution

Uplink Universal Alarm Transceiver L3-1500

- Connects to all existing control panels
- No field programmer required
- Transmits to any central station using most popular alarm signaling formats
- Built-in signal strength meter



Uplink
A Security Systems Solution

Uplink Digicell AnyNET Network Access Module L3-ANYNET

- Digital version of the 1500
- Connects to all existing control panels & transmits to any central station
- No field programmer required
- Easy installation
- RS-232 port can be used to program the unit, execute flash upgrade & micro-controller firmware modifications in the field



Uplink
A Security Systems Solution

USP Cellular Voice Dialer for Back-Up & Remote Application US-CVD2000

- Cellular voice dialing
- Backup protection against cut phone lines
- Incl. power transformer with MC-2A charge card
- US-AD200 Automatic Voice Dialer
- 4 channels, calls up to 8 numbers
- Calls landlines, pagers, cell phones
- Aux output



USP
United Security Products, Inc.

USP Cellular Voice Dialer with Free Cellular Phone w/Cingular Service US-CVD2020

- CVD2000 with free activated cell phone offer
- Perfect for back-up or temporary security installations
- Eliminates purchasing/activation a compatible phone
- Must be activated by USP on Cingular Standard Cellular Rate Plan to receive free phone offer
- Offer expires 3/31/06



USP
United Security Products, Inc.

Eagle Security Products Millennium Line Sentinel™ Dual Line Monitor & Auto Switcher EG-301310

- Monitors & switches 2 telephone lines
- Dual trip relays & LEDs
- Auto switches 2nd line for 1st line
- Auto reset
- Dual status LEDs

EAGLE SECURITY PRODUCTS, INC.

USP LiveShot Wireless Security Camera US-CVC4000

- Sends LIVE pictures information to 20 cell phones & e-mails
- Includes AIM unit for easy hook up to panel, PIR, retro-fit or other external devices
- Free companion cell phone for receiving pictures, video clips and data
- Phone & camera must be activated by USP on Cingular network to take advantage of free phone offer
- Offer expires 3/31/06



USP
United Security Products, Inc.

USP LiveShot Portable Live Cellular Camera US-CVC4000P

- Perfect for temporary surveillance/monitor/verification applications
- No wires - transmits using built-in cellular transmitter
- Free companion cell phone for receiving pictures, video clips and data
- Phone & camera must be activated by USP on Cingular network to take advantage of free phone offer
- Offer expires 3/31/06



USP
United Security Products, Inc.

Telular Telguard Digital Cellular Communicator AD-TG7

- NEW ALL DIGITAL GSM cellular
- Full zone data
- Locking enclosure, TLM & power supply
- Plug & Play installation
- Works with partitioned panels



TELULAR
CORPORATION

Telular Telguard Digital Cellular Communicator AD-TG1

- NEW ALL DIGITAL GSM cellular
- UL Primary Residential Listing for Burglary and Fire
- Ideal for VoIP/cell phone customers
- Contact ID only - full zone data
- Plug & Play installation - no programming



TELULAR
CORPORATION

Telular Telguard Digital Cellular Communicator AD-TG4

- NEW ALL DIGITAL GSM cellular
- UL Primary Residential Listing for Burglary and Fire
- UL Commercial Supplemental Listing
- Telephone Line Monitor (TLM) & power supply
- Contact ID, SIA2 & pulse formats - full data
- Plug & Play installation - no programming



TELULAR
CORPORATION

Telular Telguard Digital Cellular Communicator AD-TG7A

- NEW ALL DIGITAL GSM cellular
- Full zone data
- Attack resistant, anti-tamper locking enclosure
- Telephone Line Monitor (TLM) & power supply
- Plug & Play installation
- Works with partitioned panels



TELULAR
CORPORATION

Telular Telguard DataBurst Cellular Communicator AD-TG100

- Transmits full data
- Simple plug-and-play installation
- Enclosure, power supply and TLM included
- UL Primary Residential Listing
- Ideal for VoIP and cell phone only customers



TELULAR
CORPORATION

Telular Telguard DataBurst Cellular Communicator AD-TG300

- Transmits full data to central station
- Plug-and-play installation
- Enclosure, power supply and TLM included
- UL Grade A Burglary, UL Fire and UL Bank, Safe & Vault listings



TELULAR
CORPORATION

Telular Telguard Digital Cellular Communicator AD-TG8A

- NEW ALL DIGITAL GSM cellular
- UL Grade A Burglary, UL Fire and UL Bank, Safe & Vault Listings
- E911 voice service
- Transmits full data to central station



TELULAR
CORPORATION

USP Telephone Line Monitor US-TLMR

- Screw terminal hookup
- Supervised NO or NC operation
- 17 second delay prevents false alarms
- Operates with most alarm systems
- Works with cellular backup, such as Uplink L3-1500



USP Power Failure Emergency Caller US-PFEC

- Senses loss of power and based on settings, will notify parties of loss condition only when time has elapsed. If power is restored before time, no call is made



Also avail.: US-PF2EC & US-PF4EC



UltraTech RJ31X Surface Jack and 2' Cord IM-RJ31XSET

- 50 micron gold contacts
- Surface mount
- 2ft. - 8 conductor jack to spade lug cord



Excelsus® Alarm Panel DSL Filter 1E-ZA431PJ3X

- Protects alarm panel modem from DSL interference
- RJ31X-RJ38X plug supports line seizure and cut-line protection
- Quick & easy to install and test
- Compatible with most major ADSL, HPN and alarm systems



Modular Devices Digital Dialer Accessories

- MO-917UL50
- 8-wire jack
- MO-RJ31X
- 8-pin wire jack
- MO-362
- 2 ft. length cord
- MO-368
- 8 ft. length cord
- MO-91448UL
- Duplex adaptor



MODULAR DEVICES, I

Apex Communication/Serial Printer Interface XP-RS232

- DTE or DCE format 9-pin serial port
- Selectable data format
- Open architecture protocol available



Honeywell


Dolphin RJ31X Jack & Cords DP-DC3112

- RJ31X jack & 2' spade cord
- DP-DC3142
- RJ31X jack & 2' plug to plug cord
- DP-DC3120
- 2' plug to spade cord
- DP-DC3170
- 7' plug to spade cord



Better Way Products Line Seizure in 1 minute! BM-BW1

- Now it is possible to connect any alarm panel to the phone line quickly & easily without disturbing any of the existing telephone wiring in order to obtain line seizure. Put an end to phone line related service calls forever!



Better Way

ADEMCO Flush Mount PIR 995

- 40' x 56' coverage standard
- Fits into a single-gang box or directly into the wall
- 6 year warranty



- Optional Lenses**
- 995PA (40' x 56' pet alley)
- 995LR (70' x 8' long range)



IntelliSense Pet Immune PIR Detector CK-IS2260

- 60' x 120' coverage
- Advanced ASIC processing
- Immunity to pets up to 40lbs.
- Totally silent relay
- Uniform sensitivity optics
- Ultra low current

- Also Avail.: CK-IS2260T
- With tamper
- Also Avail.: CK-090005302
- Long range lens 100' x 20'



IntelliSense PIR Motion Sensor CK-IS215T

- 40' x 40' coverage
- Black bug guard
- Mirror look down zone
- Selectable pulse count
- Cover tamper

- Also Avail.: CK-IS215TCE
- With temp comp & microprocessor control



ADEMCO 998 Series Fresnel PIR 998

- 50' x 50' coverage
- EZ-mount install
- Wide angle, pet alley & long range lenses included

- 998PK
- 998 convenient 6 pack
- 6 year warranty



ADEMCO Quad PIR Detector RX4GLD

- 35' x 45' coverage
- Enhanced RX processing
- Selectable sensitivity
- Pet immunity up to 45lbs.
- Zone locating walk test mode
- 6 year warranty



ADEMCO PIR Motion Sensor AURORA

- 35' x 45' coverage
- Immune to pets up to 40lbs.
- Advanced ASIC processing
- Ultra-low current
- Totally silent relay • Selectable pulse count

- Also Avail.:
- AURORA-PK • Aurora 6-pack
- AURORA-LR • Long range lens (75' x 10')
- AURORA-T • With tamper



ADEMCO PIR Motion Sensor 998PI

- 35' x 45' coverage
- Pet immunity to 40lbs.
- EZ-Mount install features
- Split zone optics technology
- LED enable/disable
- 6 year warranty



IntelliSense

Selectable Pet Immune PIR Detector CK-IS2535

- 35' x 45' coverage
- 0, 40 or 80 lbs. pet coverage selectable
- 4 sensitivity settings
- Bi-directional temperature compensation
- CK-IS2535TC -
Form C relay, Alarm Memory & case tamper
- CK-SMB10/10T/10C -
Swivel brackets

Wide Area PIR Detector CK-IS2560

- 60' x 85' coverage
- 4 sensitivity settings
- Bi-directional temperature compensation
- Microprocessor controlled
- Totally silent high security relay
- CK-IS2560TC -
Form C relay, Alarm Memory & case tamper
- CK-SMB10/10T/10C -
Swivel brackets

Long Range PIR Detector CK-IS25100TC

- 100' x 20' coverage
- Bi-directional temperature compensation
- Microprocessor controlled
- Totally silent high security relay
- Front & back tamper
- Alarm memory
- CK-SMB10/10T/10C -
Swivel brackets



UL Honeywell

Rokonet

CoMET PET Wide Angle Detector RK-210PT000A

- 26' coverage, 90
- Pet immunity for 42lb. dogs, 2 cats or multiple rodents
- Temperature compensation
- RF immunity - 20V/m
- Selectable pulse count (1, 2, 3)
- White light protection



Also avail.: RK-210PR0000A
• CoMET PIR

ROKONET

IntelliSense

360° Ceiling Mount PIR CK-IS280CM

- 50ft., 360° pattern @ 12' height
- 8' - 12' mounting height
- Low profile
- Alarm memory
- Tamper switch



UL Honeywell

ADEMCO

Ceiling Mount PIR 997

- 360° look-down
- 23' - 36' diameter coverage
- 7'-12' mounting height
- "Signature Analysis" pulse count for RFI immunity
- Twist-off cover for easy installation
- 3.375" (W) x 1" (H)
- 6 year warranty



UL Honeywell

Rokonet

LuNAR DT Ceiling Mount Detector with 360° RK-RK150T

- Dual PIR & MW technologies
- 9' - 13.4' mounting height
- Microprocessor-controlled
- Patented true temperature compensation
- Microwave range adjustment
- Superior RF immunity



Also available: RK-2000DPC
• LuNAR PIR

ROKONET

Bosch

Pet Immune PIR Detector DS-DS940P

- 40' broad coverage
- Small unobtrusive design
- Pet and animal immunity
- Draft/insect immunity
- Easy to install with flexible mounting options
- 5 year warranty



Also available: DS-DS940PT UL BOSCH

Bosch

Long Range PIR Detector DS-DS778

- 200' x 15' coverage
- Pointable mirrored optics
- Hi efficiency LED aids in testing
- 4 mounting options
- 5 year warranty



UL BOSCH

Bosch

Long Range TriTech PIR Microwave Detector DS-DS720I

- Up to 300' coverage
- Anti-Mask with spray detect
- High efficiency Alarm LED can be seen throughout coverage pattern
- Patented signal processing
- 5 year warranty



FCC CE UL BOSCH

Bosch

High Ceiling Mount PIR DS-DS939

- 70' x 360° coverage
- Up to 25' mounting height
- Adjustable optics for customized coverage
- Integrated base & hinged chassis for easy install



Also available: DS-DS9370 UL BOSCH
• PIR microwave TriTech

Bosch

Ceiling Mount PIR DS-DS938Z

- 60' x 360° dia. coverage
- Up to 18' mounting height
- Mirrored optics
- Patented signal processing
- Patented self-testing features
- 5 year warranty



Also available: DS-DS9360 UL BOSCH
• TriTech PIR/Microwave

Bosch Blue Line Intrusion Detectors

- Installation-friendly 2-piece design
- Easy wiring access with plug-in terminals
- No range or height adjustments required
- 35' x 35' broad coverage • Draft & insect immunity
- Temperature compensation

PIR Detector

DS-ISMBLP1
• First Step Processing (FSP)

Pet Friendly® PIR Detector

DS-ISMBLP1P
• First Step Processing (FSP)
• Pet Friendly®

Quad PIR Detector

DS-ISMBLQ1
• 2 separate pyroelectric elements

TriTech® Detector

DS-ISMBLD1PF1
• Dual detection technologies • 8 detection layers
• Supervised microwave • Flexible mounting height



Optional Modules

Color Camera Module

DS-ISMBLA1CCN

Monochrome Camera Module

DS-ISMBLA1CCN

Nightlight Module

DS-ISMBLA1LM
• Motion activated • 2 brightness levels
• Exterior switches control light

Sounder Module

DS-ISMBLA1SM
• Supervised & controlled by control panel
• Loud burglar annunciation



UL BOSCH

Bosch DS860 Tritech PIR Detector DS-DS860

- 60' x 60' coverage
- 100' x 100' long range coverage
- Microwave supervision
- 5 mounting options
- Draft/insect immunity
- 5 year warranty



Visonic Micro PIR Detector Series

VS-CLIP1

- 35' x 45' 100°

VS-CLIP4

- Solid curtain 20'

- Full size PIR power in an attractive miniature design



Visonic Ceiling Mount PIR VS-DISC

- 36' diameter coverage @ 12' mounting height
- Ceiling mount detection with 360° coverage pattern
- Selectable pulse count



Visonic Spy Series Micro PIR's VS-SPY1

- Long range 35' coverage

VS-SPY2

- 50° x 25' coverage

VS-SPY3

- 100°, 25' coverage

VS-SPY4

- Solid curtain

- Micro PIR, 3/4" diameter - Flush mounty



Visonic K-9 Series Pet Immune PIR VS-K940

- 30' x 30' coverage
- Pet immunity up to 40lbs.
- TSI™ - Target Specific Imaging
- Also available in a convenient 12 pack (VS-K94012PAK)



Visonic Digital Pet Immune PIR VS-K985

- True Digital 85 lb. pet immune detector
- 3D cylindrical optics eliminates "dead" spots
- Easy install with adjustment-free mounting and remote walk test
- Available in a convenient 12 pack (VS-K98512PAK)



Visonic V-MOTION 10-Pack Digital Motion Detectors VS-VMOTION

- True Digital™ technology
- 40 ft. coverage with Creep Zone
- Simple and easy installation, no vertical adjustment needed
- True Motion Recognition™ technology distinguishes between true and false alarms



Aleph Pet Immune AL-XP40

- Pet immune
- Look down
- Pulse count selectable
- Temperature compensation
- RFI immunity



Optex Ceiling Mount PIR Detector OP-SX360Z

- 276 zones for a 60' diameter, 360° pattern
- Adjustable L, M & H sensitivity
- Selectable 1, 2 & 4 pulse count
- Zoom control fits 8' to 16' ceilings
- Rugged housing for institutional use
- 5 year warranty



Optex PIR Detector OP-EX35T

- Selectable wide angle, long range & pet alley patterns
- Premium optics:
 - spherical lenses
 - multi-focus patterns
- 64 zones (wide angle) 12 zones (long range)
- Selectable 2 or 4 pulse count
- 5 year warranty



Aleph Ceiling PIR AL-SPS20N

- Mirrored optics
- Wall or ceiling mounted
- Pulse count
- Sensitivity adjustment



Optex Wireless Multi-Stabilized Outdoor PIR Detector OP-VX402R

- 40 ft. stabilized detection area
- Battery operated, outdoor security sensor for use with wireless systems
- 100 lb. Pet Immunity
- Compatible with any existing RF transmitter
- Completely "weatherized" for direct exposure to outdoor elements
- Temp. compensation



Optex Ceiling Mounted PIR Detector with Pet Immunity OP-KX08

- 25 ft. x 25 ft. detection
- Compact, ceiling mount design
- Sealed housing
- Small animal detection immunity
- Quad zone logic
- 5 year warranty



Optex Passive Infrared Motion Detector OP-RX40PI

- 40' x 40' wide angle coverage
- Spherical lens for perfect focus
- Temp. compensation circuit
- Selectable 2 or 4 pulse count
- Quad Zone logic provides "Pet Immunity" level false alarm protection
- 5 year warranty
- Also available in 10-pack



Optex Outdoor PIR Detector

OP-LX402
OP-LX802N

- 40' x 50' (120°) pattern or 80' x 6' long range
- Multi-level and pet alley pattern
- Photocell for day/night operation
- High grade plastic & sunlight filtering
- 2 year warranty



Optex Commercial Grade PIR Detector with Anti-Masking

OP-CX502

- 50 ft. long range coverage
- Prevents false alarms from environmental disturbances
- Selectable sensitivity
- Onboard circuit self-check function
- Silent relay



Optex Long Range PIR Detector

OP-CX702

- 70 ft. wide angle detection
- 150 ft. long range detection
- Multi-focus optics
- False-alarm protection
- Disturbance free tamper switch
- Selectable pulse count
- 3-step angle adjustment



Optex Ceiling Mount PIR Detector

OP-FX360

- 25' at 8', 360° coverage
- SMD technology
- Selectable pulse
- LED on/off switch count
- 5 year warranty



Optex Redwall Outdoor PIR Detector

OP-LRP4010S

- 130' x 30' detection
- OP-LRP3020S
- 100' x 65' detection
- OP-LRP404S
- 130' x 13' detection
- Dual channel processing
- Rugged metal construction
- Tamper protected
- Heated versions available



Optex Redwide WideAngle Outdoor PIR Detector

OP-LRP5030

- 165' x 100' coverage
- Triple dual-element detection
- Gold coated optics
- Thermal protection & vandalism resistant
- Rugged metal construction
- Heated versions available



Optex Multi Stabilized Outdoor PIR Detector

OP-VX402

- OP-VX402REC
- 40' x 40' (90°) pattern w/180° aiming
- Adjust. Dual PIR's block false alarms
- Plays back prerecorded voice message upon detection (REC model)
- Temperature consumption circuitry
- High RFI & sunlight immunity
- 2 or 4 pulse count
- 2 year warranty



Optex Redwall Long Range Outdoor PIR Detector

OP-LRP100Q

- Over 330' x 10' detection pattern
- Quad element detection
- Optional sun/snow protective shield
- Rugged metal construction
- Heated versions available



Optex MegaRed Super Long Range Outdoor PIR Detector

OP-LRP180QH

- 595' super long range
- Separate "near" and "far" alarm outputs
- Mounting bracket and separate controller included
- Rugged metal construction
- Built-in heater



Protech Pyramid XL2 Outdoor Dual Detectors "Enhanced Bird/Animal Immunity"

PK-SDI76XL2
• 50' x 50' coverage
PK-SDI77XL2
• 90' x 50' coverage

* Optional sounder:
PK-XLSOUNDER



TAKEX Indoor/Outdoor PIR

PU-MS100E

- 33' wide angle and 66' long range lenses
- Vertical, horizontal & ceiling mount
- Rotating sensor head
- Photo-cell, day/night operation
- Sensitivity adjustment
- N/O & N/C selectable output
- 5 year warranty



TAKEX Dual Zone Outdoor PIRs

PU-MS12FE

- 2 Dual Zone, wide angle PIR sensors
- Sensors independently adjustable
- AND/OR functionality
- Variable angle up to 180°
- PU-MS12TE
- Variable angle up to 90°
- Sensors independently adjustable
- AND/OR functionality
- Photo-cell, day/night operation
- Sensitivity adjustment
- 12-30 VDC non-polarity



Protech Pyramid LT for Protecting Ladders & Towers

PK-77XLDIRLT

- 50' narrow angle coverage
- Direction control adjustable
- "Approach Mode" detects climbing
- Dual technology PIR and MW



TAKEX 180° Coverage PIR

PU-PA480S

- 53' x 26' x 180° coverage
- Individual range adjustment each 90°
- Creep zone
- N/C relay, pulse count
- 5 year warranty



ADI's
2006 Expo Series
is on the road again and
coming to a location near you.
Check the Expo Guide on page 8
or contact your ADI branch
for more info.

TAKEX
Pet Immune Ceiling Mount PIR
PU-PA6612E

- 40' x 40' coverage
- Twin pyro twin mirror optic PIR
- Uniform detection throughout coverage pattern
- High immunity to 40 lb. animal
- Sealed unit keeps out bugs
- "Snap In" body to base
- 5 year warranty


TAKEX
PA-7000 Series Quad PIRs
PU-PA7012

- 50' x 50' coverage
- 100' x 6' coverage
- 60' coverage at 15' height
- Digital processing for stable detection in difficult environments
- Mirror optics
- 5 year warranty


TAKEX
Ceiling Mount PIRs
PU-PA6812

- 40" x 40" coverage
- 66" vertical curtain
- Silent output Photo-Mos FET switch
- Fully sealed unit "Keeps bugs out"
- "Snap-in" body to base
- 5 year warranty


TAKEX
Mirror Optic "Fuzzy Logic" PIR
PU-PA4810 • 40' x 53' coverage
PU-PA4820

- 83' vertical curtain
- Mirror optics
- Quad element sensor
- Pulse count sensitivity
- "Fuzzy Logic" processing
- Easy LED aiming system
- 5 year warranty


TAKEX
"Interceptor" Series PIR
PU-PA450

- 36' x 48' coverage
- PU-PA450PI
- Pet immune to 40 lbs.
- PU-PA460
- 55' vertical curtain
- Selectable N/O or N/C output
- Creep Zone (except PI) * These features apply to both PU-PA450 & PU-PA460 models only
- 5 year warranty


TAKEX
Ceiling Mount PIRs
PU-PA6805

- 13" dia. spot protection @ 16' mounting height
- PU-PA6810E
- 50" dia. @ 16' mounting height
- Hi performance fresnel lens sensor
- Silent output Photo-Mos FET switch
- Fully sealed unit "Keeps bugs out"
- "Snap-in" body to base
- 5 year warranty


GE Security
Mirror Optic PIR
SR-AP669

- 2 independent 180° fields of view
- 60' diameter, 360° coverage
- 18 "True Curtains"
- Optional 4" base - MP-AP669BP
- Mounts up to 16'
- UL Listed
- 5 year warranty


GE Security
Outdoor/Industrial PIR
SR-6187CTXN

- 45' X 45' coverage
- Cast metal housing
- Water resistant for indoor/outdoor applications
- Operates from -40°F to 120°F
- UL approved for outdoor use


GE Security
Mirror Optic PIR
SR-AP633A

- 200' long range
- 80' wide angle
- 12 coverage patterns
- Optional swivel bracket MP-BR601


GE Security
PIR Detector
SR-AP450

- 50' x 50' coverage
- 9 true 3D curtains
- Gliding focus mirror optics
- Adaptive PIR technology
- 3D signaling processing
- Form C


GE Security
PIR Detector
SR-PI6000

- 40' x 40' coverage
- Up to 30lbs. small animal immunity
- Form A with tamper
- Available in 6 packs


GE Security
Sharpshooter PIR
SR-6155

- 45' x 45' coverage
- Bi-directional pulse count with event verification
- Advanced dual pyroelectric sensor
- Adjustable swivel bracket


GE Security
SureShot Flush Mount Fresnel PIR
SR-6255FM

- 2-step installation into single gang box
- 5 coverage patterns including 360° ceiling mount
- Bi-directional pulse counting & motion verification


GE Security
Mirror Optic Pet Immune PIR
SR-AP100PI

- Ignores pets up to 44 lbs.
- Adaptive 4D signal processing analyzes size, speed & shape
- True curtain "barrier" coverage pattern


GE Security
PinPoint Addressable PIR
SR-AP750ID

- Addressable PIR for SR-NX2192 interface
- Provides 4 separate curtain coverage patterns
- Adaptive signal processing
- Flat wall or corner mounting
- 7 full curtains with 50° range



**GE Security
Mirror Optic 75
Single Curtain PIR
SR-AP475**

- Mount up to 16'
- One 75" x 4.8" curtain
- Tamper contact included
- Add Form C relay


**GE Security
Fresnel PIR
SR-6540W**

- Selectable 2 or 3 pulse count
- 40' range
- Selectable LED always on or only in walk test
- Ships with swivel brackets
- Tamper included


**Crow SRP360°
Ceiling Mount 360° PIR
CW-SRP360**

- Mount 10' high-protect 26" diameter
- Mount 16' high-protect 41" diameter
- -4°F to +158°F with auto temp compensation
- Quad PIR-80 zone/360° coverage
- Hard spherical lens


**GE Security
Mirror Optic 2-in-1
Pet Immune PIR
SR-AP950PI**

- Ignores single pets up to 80lbs.
- Ships with pet lens installed, optional standard 50' lens included
- 9 curtains for total barrier protection


**GE Security
Mirror Optic Anti-Masking PIR
SR-AP950AM**

- High security PIR detects attempts at blocking its field of view
- 9 curtains of either 50' or 33' with masking options
- Electronic trouble output


**Crow
Microwave Double Mirror Optics
"Triple Technology" Outdoor Detector
CW-MRX300**

- Up to 49' detection range with 90° wide angle mirrors
- Up to 130' detection range with long range mirrors
- Operating temp. range: -4°F to 122°F
- "Extreme" outdoor conditions
- Industrial grade polycarbonate housing & bracket
- Pet immune up to 90 lbs.


**Crow
Talon XPRESS PIR Detector
CW-TLXPRESS**

- 50' x 70' coverage
- Adjust free mounting
- SMD technology
- Hard shell spherical lens for commercial and residential use
- **Mounting bracket included**
- 7 year warranty


**Crow CSB Series
Microwave Barriers
CW-CSB60**

- **Detection range:** up to 26' x 200'
- **CW-CSB200**
- **Detection range:** 17' x 660'
- Operating temp.: -40°F to 140°F
- Power failure protection backup
- Self test
- Easy calibration & installation
- Multi-level sensitivity adjustments


**Crow
Swan Quad
Quad Imaging Pet Immune PIR
CW-TL30**

- 60' x 60' coverage @ 90°
- Pet immunity up to 55 lbs.
- Bi-directional temperature compensation
- Slim design for residential installations
- Temperature range -4°F to 145°F


**Crow Talon 360°
Ceiling Mount PIR Detector
CW-TL360**

- Incredible 60' dia. coverage when mounted at 12'
- Attack-proof hardened lens
- High immunity to florescent lights
- 4 element sensor with range adjustment
- CW-SRP360 - for mounting heights of 12' - 16'
- RFI & EMI interface
- 7 year warranty


**Crow
Genius Double Dual™
Pet Immune ASIC PIR Detector
CW-GENIUS**

- 60' x 60' coverage
- Double Dual™ 3D optical system
- True auto temp compensation
- Unique auto 2/4 pulse count
- Lens library • Pet immunity
- 5 year warranty


**Crow-Dare Devil™
Outdoor Pet Immune PIR Detector
CW-DD**

- 60' x 60' coverage
- ASIC technology provides stability in extra harsh environments
- Water resistant & operates in temps of -4°F to +158°F
- Ignores animals, birds & insects
- Double Dual™ 3D optical system
- 5 year warranty


**Crow SRP
Crystal Vision™ Technology PIRs**

- Unique Crystal Vision™ hard spherical lenses with look-down zones
- Adjustment free mounting
- Perfect Fit™ bug & dustproof housing
- Environmental immunity
- Automatic bi-directional temperature compensation

- Spectrum analysis of environment for trouble-free operation

CW-SRP40

- 40' x 40' coverage
- Range adjustment

CW-SRP600

- 60' x 60' coverage
- Visible light filter
- High EMI/RFI immunity

CW-SRP300

- 60' x 60' coverage
- Range adjustment
- Memory latch

CW-SRP700

- 50' x 50' coverage
- Quad element pyro
- Visible light filter
- High EMI/RFI immunity
- Memory latch



**IntelliSense
DUAL TEC® DT-600 Series
PIR/Microwave**

- CK-DT640STC
- 40' x 40' coverage
- CK-DT660STC
- 60' x 60' coverage
- CK-DT6100STC
- 100' x 20' coverage
- CK-DT6360STC
- 360° ceiling mount
- 5 year warranty


**Crow
Genius Plus Pet
Pet Immune ASIC Detector**

- CW-GEPLUSPET
- 50' x 70' coverage pattern
- Latest ASIC technology
- Pulse and sensitivity adjustments
- Automatic temp compensation
- Linear imaging technology
- Super compact design
- 5 year warranty


**Crow
Pet 2/4 with Pet Immunity**

- CW-PET2
- CW-PET4
- 33' x 50' coverage
- Pet 2 - 45 lbs. pet immunity
- Pet 4 - 90 lbs. pet immunity
- Adjustment free mounting
- Automatic temperature compensation
- Unique hard shell spherical lens with bug proof housing
- 5 year warranty


**IntelliSense
DUAL TEC® DT-900 Series
PIR/Microwave**

- CK-DT901
- 50' x 40' ~ 90' x 70'
- CK-DT907
- 120' x 10' ~ 200' x 15'
- Self-adjusting thresholds
- Ratcheted swivel base
- 6 year warranty


**Optex
Dual Technology**

- OP-MX40PI
- 40 ft. wide angle range
- 100lb. pet immunity
- Integrated detection area
- Built-in anti-crosstalk system
- Noise reduction function
- Easy microwave range selector


**Optex
Dual Technology Detector**

- OP-DX40
- OP-DX60
- 40 ft. and 60 ft. indoor coverage
- Large pet immunity
- Detection area size configuration
- Anti-masking included
- School district specified combination detector
- Fail safe technology


**IntelliSense
DUAL TEC® DT-900 Series
PIR/Microwave**

- CK-DT900
- 50' x 40' ~ 90' x 70'
- CK-DT906
- 120' x 10' ~ 200' x 15'
- Self-adjusting thresholds
- Ratcheted swivel base
- Anti-masking
- 6 year warranty


**IntelliSense
DUAL TEC® DT-7550C
PIR/Microwave**

- CK-DT7550C
- 50' x 60' coverage
- MaskAlert anti-masking circuit
- DualCore processing
- K-band Microwave
- Patented Black Bug guard
- Form C relay
- Tamper switch


**IntelliSense
Mini-Tek DT515
PIR/Microwave**

- CK-DT515
- 15' x 15' coverage wall mount
- 360° coverage ceiling mount
- Recess hardware included
- Advance ASIC PIR processing


**IntelliSense
DUAL TEC® DT-7450 Series
PIR/Microwave**

- CK-DT7450
- 50' x 60' coverage
- DualCore processing
- K-band Microwave
- Patented Black Bug guard
- Tamper switch
- CK-DT7450C
- Form C relay


**IntelliSense
DUAL TEC® DT-7235 Series
PIR/Microwave**

- CK-DT7235T
- 35' x 40' coverage
- 100 lbs. pet immunity
- No adjustments
- K-band Microwave
- With tamper switch


**IntelliSense
DUAL TEC® DT-7435 Series
PIR/Microwave**

- CK-DT7435
- 35' x 35' coverage
- 100 lbs. pet immunity
- DualCore processing
- K-band Microwave
- Tamper switch
- CK-DT7435C
- Form C relay


**GE Security
Pet Immune Range-Controlled
Radar™ Detector**

- SR-RCRPET
- Ignores animals up to 80 lbs.
- Dual RCR/PIR Technology
- Coverage-on-Demand™ (9, 18, 27 and 35 ft.)


**GE Security
Range Controlled Radar Detector™**

- SR-RCRA
- SR-RCRC
- Exclusive Range-Controlled Radar technology
- Coverage on demand (9, 18, 27 & 35ft)
- Radar-only setting for stealth mounting
- SR-RCRC has Tamper and Form C relay
- Dual Tech


**GE Security
Commercial 50 Ft.
Range-Controlled Radar™ Detector**

- SR-RCR50
- New long range for commercial applications
- Coverage-on-Demand™ (20, 30, 40 and 50 ft.)
- Tamper & Form C relay
- Exclusive Range-Controlled Radar Technology
- Dual Tech



GE Security Dual Technology Motion Sensor SR-RCR90

- Selectable ranges (60, 70, 80 and 90 ft.)
- Tamper & Form C relay
- Exclusive Range-Controlled Radar Technology
- Stealth mounting in radar only mode



Visonic Dual Technology Detector VS-DUET

- 60' x 80' coverage
- Microcomputer signal processing
- Supervision on PIR & microwave
- Alternate polarity pulse count



Visonic K-9 Series Pet Immune Dual Tech Detector VS-K980D

- Pet immunity up to 80lbs.
- Dual technology
- 40' x 40' coverage pattern
- TSI™ Target Specific Imaging



Visonic Dual Technology Detector VS-DUO200

- 40' x 40' coverage
- PIR & microwave supervision
- Ultra small microwave source
- True temp compensation
- Dual LED's
- Anti-masking model with look down also available (VS-DUO220AM)



Visonic Ceiling Mount Dual Technology Detector VS-DUO240

- Ceiling mount 360°, 30' coverage
- PIR and microwave supervision
- True temperature compensation
- TMR™ - True Motion Recognition



Visonic Dual Tech Digital Detector VS-NEXTDUO

- Digital dual technology detector
- 3D cylindrical optics eliminates "dead" spots
- Advanced 3 in 1 model selector optimizes detection according to room size



Rokonet iWISE & COSMoS Dual Technology Detectors

RK-810DT0ULA

- iWISE DT - 30 ft. with ACT

RK-815DT0ULA

- iWISE DT - 50 ft. with ACT

RK-825DT0ULA

- iWISE DT - 80 ft. with ACT

RK-815DTQ0LA

- iWISE DT QUAD - 50 ft. with ACT

- The iWISE detectors with Anti-Cloak™ Technology ensure that no intruder passes undetected.
- Offers optimum performance in every environment

RK-811DTP

- iWISE DT PET - 30 ft., 100 lbs.

RK-815DTAM0A

- iWISE DT - 50 ft. with Anti-Mask™ & ACT

RK-800Q

- iWISE QUAD PIR - 50 ft.

RK-RK800PT

- iWISE PIR PET - 35 ft., 80 lbs.

RK-110FCUL0A

- CoSMOS DT - 30 ft.

RK-111PTUL0A

- CoSMOS DT PET - 35 ft., 100 lbs.

RK-115FCUL0A

- CoSMOS DT - 50 ft.

RK-125FCUL0A

- CoSMOS DT - 80 ft.

RK-900QL000A

- CoSMOS QUAD PIR - 50 ft.

- The CoSMOS Series is a range of DUAL TECH & PIR detectors that deliver superior catch performance with excellent false alarm immunity



Rokonet Industrial LuNAR High Ceiling Mount Detectors with 360° View & Remote Control

RK-RK200D0A

RK-RK200RC

- 360° x 72' diameter coverage pattern
- Dual Technology detector with Anti-Cloak™ Technology
- 3 independently adjustable PIR channels for customized coverage
- 3 tri-color LEDs for easy walk testing
- Intelligent Digital Signal Processing
- Remote microwave adjustment

- Diagnostic tools include detector input voltage reading & status of each PIR channel and the MW channel
- Remote control of detector settings: MW adjustment, ACT™ On/Off, LEDs On/Off
- Remote trouble indicator (Pass/Fail) for PIR, MW & power supply input



Crow PIR & Microwave Sensor with 360° Coverage Pattern CW-SRX360

- 66' coverage diameter
- Up to 12' mounting height
- ASIC based electronics
- Rodent immunity
- Suited for harsh environments



Rokonet ZoDIAC Complete Range Motion Detectors

RK-410PRL00A

- ZoDIAC Pro - Full 40' x 40' coverage
- Improved false alarm immunity
- Free swivel for wall/ceiling mounting
- Selectable pulse count
- White light protection
- RK-410PT - ZoDIAC PET
- Pet immunity up to 70 lbs., 4 cats
- RK-410RQL - ZoDIAC QUAD
- Real quad element provides added catch performance & false alarm immunity



RK-410DTPPTUL

- ZoDIAC DT - Up to 40' x 40' coverage
- Dual technology (MW & PIR)
- Microprocessor-based Digital Signal Processing
- True temperature compensation
- 3 color LED indicator for easy walk test
- Microwave range adjustment
- RK-410DTPPT - ZoDIAC DTPPT
- Pet immunity up to 75 lbs., 4 cats



Crow Dual Technology Pet Immune PIR/Microwave CW-SWAN1000 CW-SWAN2000AM

- 50' x 50' x 90° pattern
- Pet immune up to 55 lbs.
- DRO microwave technology
- Bi-directional temp compensation
- Digital microwave signal processing
- Anti-masking optional on CW-SWAN2000AM



New Line USA Inc. Outdoor Photoelectric Beam NL-IRE200

- 180° calibration
- Outdoor 200', Indoor 300' range
- Waterproof
- 12/24VAC/DC operation
- 10 year warranty



new lineusa, inc.

New Line USA Inc. Outdoor Photoelectric Beam NL-IRE35

- Outdoor 35', Indoor 45' range
- Water resistant
- For access, gates, alarm
- 12V and 24V AC/DC, Form C relay
- Less than 1" wide
- 10 year warranty



new lineusa, inc.

Bosch TriTech PIR/Microwave Detector DS-DS835I

- 35' x 35' coverage
- Flexible mounting height: 7.5' - 9'
- Pet immunity for dogs up to 100lbs.
- 8 detection layers include look-down
- 5 year warranty



Also avail.: DS-DS820i
• 20' x 20' coverage

BOSCH

IntelliSense IntelliBeam Outdoor P/E Beam Detector CK-IB250S

- 250' outdoor range
- Single pulse beam
- Pole mount kit included



Honeywell

IntelliSense IntelliBeam P/E Beam Detector CK-IB200D

- 200' outdoor range
- 100' outdoor range
- Dual pulsed beams
- Adjustable beam blocking time
- Pole mount kit included



Honeywell

Bosch Outdoor TriTech PIR/Microwave DS-OD850FI

- 50' x 50' coverage
- Linear Travel Distance virtually eliminates false alarms from targets that move but do not travel
- 2 user-selectable sensitivity levels
- Adjustable timed relay output
- User-selectable AND/OR and Day/Night modes



BOSCH

SECO-LARM® ENFORCER™ Compact Reflective Photoelectric Beam SL-E931S35RR


- For garage doors or gates
- NO/NC relay O/P
- Indoor/outdoor use
- Up to 35' range
- All mounting hardware/brackets included
- 12-240VDC / 24-240VAC



SECO-LARM®

SECO-LARM® ENFORCER™ Curtain/Barrier P/E Beam SL-E96224B25

- 25' outdoor/50' indoor
- 4 beams, Slim-Line (7/8" x 1-15/16" x 22")
- For windows, doorways, skylights, gates, etc., NO/NC alarm output
- 12 to 24VDC, 1A Form C relay
- SL-E96446B25
- 6 beams, 44" long



SECO-LARM®

SECO-LARM® ENFORCER™ P/E Beams with Laser Alignment System SL-E960D90

- 90' outdoor/190' indoor
- 190' outdoor/390' indoor
- SL-E960D290
- 290' outdoor/590' indoor
- SL-E960D390
- 390' outdoor/790' indoor
- Laser beam for alignment
- NO/NC alarm output



SECO-LARM®

TAKEX "Reflectoguard" Outdoor Reflective Beam PU-PR11BE

- 36' outdoor - 49' indoor
- Wiring only to one side
- 180° optical adjustment
- External light rejection: 50,000 lux
- 10 to 30 VDC non polarity
- 5 year warranty



TAKEX

TAKEX "Synchro Twin" P/E Beam PU-PB30TK

- 100' outdoor range. 200' indoor range
- PU-PB60TK
- 200' outdoor range. 400' indoor range
- Double pulse modulation
- Excellent value • Ext. light rejection: 50,000 lux
- 10 to 30VDC non-polarity
- Not a Chinese import
- 5 year warranty



TAKEX

TAKEX Intelligent "Synchro Twin" P/E Beam PU-PB20TE

- 66' outdoor/132' indoor range
- PU-PB40TE
- 132' outdoor/264' indoor range
- PU-PB60TE
- 200' outdoor/400' indoor range
- Double pulse modulation
- 180° optical angle adjustment
- Stackable, selectable frequencies
- 5 year warranty



TAKEX

TAKEX Super Synchronized Twin Beam PU-PB100ST

- 330' outdoor, 660' indoor range
- Double pulse modulated
- 180° optical angle adjustment
- Ext. light rejection: 50,000 lux
- 10 to 30VDC non-polarity
- 5 year warranty



TAKEX

TAKEX Intelligent "Synchro Quad" P/E Beams PU-PBIN50HF


- 165' outdoor/300' indoor
- PU-PBIN100HF
- 330' outdoor/660' indoor
- PU-PBIN200HF
- 660' outdoor/1320' indoor
- Stackable, selectable frequencies
- Double pulse modulation
- 5 year warranty



TAKEX

TAKEX Miniature Photo Electric Beam PU-PB10NSE

- Switch selectable N.O - N.C. output
- Indoor/outdoor operation
- Easy installation
- Miniature size control box
- Adjustable sensitivity
- 10 to 30 VDC non polarity
- 5 year warranty



TAKEX

TAKEX **Beam Tower Enclosures**

PU-BT150

- 4.5' tower

PU-BT200

- 6.5' tower
- 180° angle of view
- Aesthetically pleasing & rugged
- Double sided back-to-back models
- Wall mount & solar models available
- Suitable for quad & twin beams
- Photobeams not included
- 5 year warranty



TAKEX

TAKEX **PR Series Reflector Beams**

PU-PR5B

- 16.5' range with reflector
- 33' range w/double reflector
- 180° adjustable angle
- PU-PR10BU
- Flush mount version
- PU-PR1B
- 3' reflector not required

- All models indoor use only
- 5 year warranty



TAKEX

Optex **BX100 Plus** **BoundryGuard® P.E. Detector** OP-BX100PLUS

- 100' outdoor or 200' indoor range
- Surface mount only for photobeam "barrier bar"
- Extra slim design, low profile
- Optional decorative cover



UL OPTEX

Optex **BoundaryGuard®** **PIR Detector** OP-BX80N

- 40' x 3' detection area
- Dual PIRs for premium false alarm protection
- Protects multiple doors and windows
- Built-in piezo alarm indicator
- Attractive, weather resistant casing



UL OPTEX

Optex **Dual Beam Outdoor Detector**

OP-AX70T

OP-AX130T


- 70' & 165' outdoor coverage
- 130' & 330' indoor coverage
- 2 synchronized beams of pulsed infrared energy
- Automatic gain control
- Adjustable range of beam interruption time
- Anti-frost design



UL OPTEX

Optex **RedNet® High Security** **"Anti-Crawl" Beam System** OP-RN475150

- Up to 495' outdoor detection range
- 16 active infrared beams
- Field adjustable detection levels
- Fog detection circuitry
- Free standing or wall mount towers sold separately



UL OPTEX

Optex **MKII Series Photoelectrics** OP-AX650MKII

- 650' outdoor coverage
- 1300' indoor coverage
- IP54 enclosure, Anti-frost design
- Patented AISC Alignment circuitry
- Environment disqualification circuit
- 14Kv lightning protection, Form C relay
- 5 year warranty



UL OPTEX

Optex **Plus Series Photoelectrics** OP-AX250PLUS OP-AX500PLUS

- 250' & 500' outdoor coverage
- 500' & 1000' indoor coverage
- 10.5 - 30VDC, 55mA draw
- 99.5% beam blockage resistance
- Anti-frost design
- 14Kv lightning protection, Form C relay
- 1/2" conduit knockouts



UL OPTEX

Optex PLUS/ALPHA Series **Photoelectrics** OP-AX100PLUS OP-AX200PLUS

- 100' & 200' outdoor coverage
- 200' & 400' indoor coverage
- Finger control alignment
- 14Kv lightning protection, Form C relay
- IP54 enclosure for long product life
- ALPHA Series for adjustable frequency & LED alignment



UL OPTEX

Crow **Single Photoelectric Beam Sensors** CW-CAB15S

- Surface mount unit

CW-CAB15F

- Flush mount unit

- 50' outdoor & 100' indoor detection range
- Horizontal & vertical angle alignment
- 3-step LED indicator for accurate fine beam alignment



Crow **Twin Photoelectric Beam Sensors** CW-CAB30T

- Up to 200' detection range

CW-CAB60T

- Up to 400' detection range

CW-CAB90T

- Up to 5400' detection range

- Lightning protection
- Automatic Gain Control circuit
- Adj. beam interruption period (50msec-700msec)
- Temperature range -13°F - 131°F
- Anti-frost design



Optex **Digital Photoelectric Detectors** OP-AX350DHMKIII

- 350' outdoor & 700' indoor coverage
- Full digital communication
- UL & CUL Listed

OP-AX650DHMKIII

- 650' outdoor & 1300' indoor coverage
- Dual alignment LED level indicator for supreme optical alignment
- Superior protection against water, dust & insects (IP 65 rated)
- Anti-frost hood cover



UL OPTEX

Aleph **P/E Beam Detectors**


AL-HA200D

- 200' outdoor, 400' indoor coverage

AL-HA350D

- 350' outdoor, 700' indoor coverage
- 90mA max @ 12VDC

- 5 year warranty



ALEPH
AMERICA CORPORATION

Aleph **Photoelectric Detectors**

AL-HA70D

- 70' coverage

AL-HA125D

- 125' coverage

- Dual beam, weather resistant
- 10.5-26VDC (no polarity) or 8-18.5VAC
- 5 year warranty



ALEPH
AMERICA CORPORATION

Aleph **P/E Beam Detectors**

AL-HA50IN

AL-HA50INF

AL-HA100IN

AL-HA100INF

- Compact indoor detectors
- Surface/flush models
- *AL-HA50IN - 50 ft.
- *AL-HA100IN - 100 ft.
- High immunity to light sources
- 5 year warranty



ALEPH
AMERICA CORPORATION

PHOTOBEAMS

Rokonet WatchOUT Reliable Outdoor Protection

RK-315DT0000A

- WatchOUT Dual TechRK-312PR0000A

RK-315DTC000A

- WatchOUT DT with camera
- WatchOUT PIR with camera

RK-312PRC000A

- WatchOUT Outdoor Detectors provide the ultimate in reliable outdoor protection. WatchOUT is unique in its capability of recognizing and distinguishing between real intrusion events and the numerous false alarm causes inherent in the unstable outdoor environment
- Sway Recognition and Digital Correlation Technologies for minimizing false alarms
- 3' - 9' installation height
- Includes swivel + long-range, barrier and low pet replacement lenses and a wide range of swivel accessories for wall, pole and barrier installations.
- Optional intergrated camera
- Extensive remote control and diagnostics features when installed with Rokonet's ProSYS intergrated security system.
- Hood provides protection from sun, rain, snow, hail, and birds
- WatchOUT provides selective event recognition utilizing: Sway Recognition Technology that uses 2 microwave channels to recognize and exclude objects that sway, such as bushes and tree limbs.
- Digital Correlation Technology that uses two PIR channels with interlacing detection patterns. Only targets creating similar and correlated signal in both PIR channels are taken into account.



ROKONET

GE Security Sharpshooter PIR

SR-6157CT

- 40' x 40' coverage
- Cold temperature unit operates from -40°F to 120°F
- Fresnel lens packs available for various applications
- Adjustable swivel bracket



ACT Meters PIR Stabilizer

B6-ACT1376

- Prevents PIR false alarms caused by RFI
- Suitable for 12V PIR's and dual detectors
- Provides extra EMI/RFI stabilization
- Simply installs inside the troublesome PIR



ADEMCO 3/4" Stubby Plunger Switch with Screw Terminals

955PST-BR

955PST-WH

- "Staggered-T" terminals eliminate wire splicing & soldering
- Fast & easy to install

Also available:

955PS-WH-B

955PS-BR-B

- With 18" wire leads




Honeywell

ADEMCO 3/8" Recessed Contact with Screw Terminal

944T-WH

944T-BR

- 3/8" dia. press fit
- Standard gap: 3/4" (19mm)
- "Staggered-T" terminals eliminate wire splicing and soldering
- Ammo box packaging
- Lifetime warranty



Honeywell

ADEMCO 3/8" Recessed Contact with Terminals & Rare Earth Magnet

944TRE-WH

• White944TRE-BR

• Brown

- Standard gap: 1/2"
- Rare earth magnet
- Staggered "T" terminals



Honeywell

ADEMCO 3/4" Stubby Roller Plunger Switch

956RPT-WH

956RPT-BR

- "Staggered-T" terminals eliminate wire splicing & soldering
- Fast & easy to install

Also available:

956WH-B

956BR-B

- With 18" wire leads



Honeywell

ADEMCO 3/4" Recessed Contact with 3/8" Mag & Screw Terminals

944TSP-WH

944TSP-BR

- Standard gap: 3/4" (19mm)
- "Staggered-T" terminals eliminate wire splicing and soldering
- Ammo box packaging
- Lifetime warranty




Honeywell

ADEMCO 3/4" Recessed Contact with 3/8" Magnet

944SP-WH

944SP-BR

- Stand. gap: 3/4" (19mm)
- 3/4" diameter switch
- With 3/8" diameter magnet
- Ammo box packaging
- Lifetime warranty



Honeywell

USP Arrowhead 3/8" Load & Lock Contact with Disc Magnet

US-A1DW

- Perfect for vinyl windows & doors
- Easiest install & maintenance
- Stubby size switch with mini disc magnet
- Fits where other contacts can't
- Powerful rare earth magnet gives wide gap
- Exclusive threaded design



United Security Products, Inc.

ADEMCO Rollerball Reed Contact

956WH-B

956BR-B

- 3/4" diameter
- Tapered design for easier installation
- Spacers included
- Lifetime warranty



Honeywell

GRI
9/16" Push Button Switch

GI-PB100WH

• White

GI-PB100BR

• Brown

- 9/16" press to fit, Closed loop
- 12" leads or screw terminals
- Built-in end of line resistors available
- White or brown
- Lifetime warranty


GRI
3/4" Flanged Push Button Switch

GI-PBF100W

• White

GI-PBF100B

• Brown

- 3/4" with screw down flange, Closed loop
- 12" leads or screw terminals
- Built-in end of line resistors available
- White or brown
- Lifetime warranty


GRI
Recessed 1/2" Short Switch Set

GI-150RS12W

• White

GI-150RS12B

• Brown

- 1/2" recessed short Closed loop
- 1/2"+ standard gap 3/4"+ wide gap
- 12" leads or screw terminals
- Hole size allows for extra wire
- White or brown
- Lifetime warranty


GRI
3/8" Series Plunger Switches

GI-PB2020WH

• White

GI-PB2020BR

• Brown

- Press to fit with 12" leads or screw terminals, Closed loop
- 3/8" diameter adjustable screw plunger
- White or brown
- Lifetime warranty


GRI
3/8" Series Flanged Plunger Switches

GI-PBF2020WH

• White

GI-PBF2020BR

• Brown

- Press to fit with 12" leads or screw terminals, Closed loop
- 3/8" diameter adjustable screw plunger
- White or brown
- Lifetime warranty


GRI
3/8" Short Press To Fit Switch Sets

GI-20RS12WH

• White

GI-20RS12BR

• Brown

- Press to fit with 12" leads or screw terminals, Closed loop
- 3/8" diameter, .625" long
- Built-in end of line resistors available
- White, brown, gray
- Lifetime warranty


GRI
DS Series Dome Switch

GI-DS01W

• White

GI-DS01BR

• Brown

- Omni Directional activation, 3/4" length, Closed loop
- 12" leads & screw terminals
- Screw down flange
- Built-in end of line resistors available
- Lifetime warranty


GE Security
3/8" Flanged Recessed Contacts

SR-1072

- Mounts easily on oversized holes
- Mounting screws included


GE Security
3/8" Press Fit Contact

SR-1075

SR-1075BR

- 1/2" gap, Closed loop
- Heavy-duty housing with wire leads
- Dispenser box packaging
- Wide gap and SPDT options available
- Available in brown and natural
- 5 year warranty


GE Security
3/4" Steel Door Recessed Contacts

SR-1078C

SR-1078CBR

SR-1078CGY

- 3/8" gap
- Designed for steel door use
- Rugged unibody construction
- Special ribbed sides for easy installation
- Available in 3/4" wide gap
- Available in brown and natural
- 5 year warranty


GE Security
3/4" Steel Door Terminal Contacts

SR-1078CTM

SR-1078CTN

- 7/8" gap, 3/8" in steel
- Special ribbed sides for easy installation
- Terminals accept 14-22 gauge wire
- 2" wide gap models available
- Available in brown and natural
- 5 year warranty


GE Security
3/8" Press Fit with Terminals and Mini Max™ Contacts

SR-R1125TN

- 1/2" gap, Closed loop
- 1.08" long
- Rare earth magnet
- Stubby press fit
- Magnets install with glue, double-stick tape or stainless steel screw
- Wide gap & brown models available
- 5 year warranty


GE Security
3/8" Stubby Terminal Press Fit Contact

SR-1125TN

- 1/4" gap
- Terminals accept 14-22 gauge wire
- Switch 1.313" L, mag 1.08" L
- Provides consistent connection
- Easy to install
- Wide gap available
- 5 year warranty


GE Security
3/8" Wing Fit™ Contacts

SR-R1225N

- 1/2" gap, Closed loop
- 3/4" length
- Rare earth magnet
- "Wings" protect reed from being crushed by swelling wood
- Ideal for vinyl-clad & custom windows
- Installs quickly in over-drilled holes
- Available options: brown, wide gap
- 5 year warranty


GE Security
3/4" Roller Plunger

SR-3008

SR-3008BR

- 3/4" long
- Ideal for pre-wire installations
- Recessed reed
- Spacers and screws included
- Only one drilled hole needed
- Available in brown or white
- Available in dispenser box option
- 5 year warranty




GE Security
3/8" Press Fit with
Mini Max Contacts
 SR-R1075N

- 1/2" gap
- 1.13" length, Closed loop
- Rare earth magnet
- Mounts with glue, double stick tape or screws
- Ideal for vinyl clad windows
- Dispenser box packaging
- Also available in brown
- 5 year warranty


GE Security
3/8" Diameter
Wing Fit Recessed Contact
 SR-1275

- Flexible wings conform to angled, misaligned or irregular holes
- Short switch body
- Wider gap distances
- Wire leads


USP
Twist Loc Mag


- US-240
 - 1/4" x 1/2" length, 0.375" gap
- US-250
 - 1/4" x 1.3" length, 0.50" gap
- US-260
 - 3/8" x 1/2" length, 0.675" gap
- US-270
 - 3/8" x 1.3" length, 0.75" gap
 - Lifetime warranty


GE Security
3/8" "Stubby" Press Fit Contact
 SR-1125BR
 SR-1125N

- 1/4" gap, Closed loop
- Switch only 3/4" long ideal for thin framed doors or windows
- 12" wire included
- Also available in brown, wide gap
- 5 year warranty


GE Security
1/4" Stubby Recessed Contact
 SR-1058

- Bare magnet
- Perfect for window screen protection
- Miniature concealed switch


USP
3/8" Stubby Press Fit Contact


- US-150SPBR
- US-150SPWH
 - 10/16" gap
 - Rhodium metal contact
 - Alinco magnets - USA manufactured
 - Pre-wired 24" leads
 - Closed circuit
 - Lifetime warranty


ADEMCO
3/4" Recessed Steel Door Contact with Screw Terminals

- 947-75TWH
- 947-75TBR
 - Standard gap: 1/2" (12mm) in steel
 - 5' leads
 - "Staggered-T" terminals eliminate wire splicing and soldering
 - Lifetime warranty


ADEMCO
3/8" Stubby Recessed Contact w/Rare Earth Button Magnet
 PRO51BTM-WH

- Stand. gap: 1/2" (13mm)
- Rare earth magnet
- Stubby press fit with button magnet
- Smooth flush fit with convex mag hole
- Lifetime warranty


USP
Arrowhead 3/8" Load & Lock Contact

- US-A1BR
- US-A1W
 - Up to 1" gap
 - Stubby size
 - Rare earth magnet 1" long
 - Self-thread into 3/8" drilled wood or thin metal jambs & frames
 - Now available in new quick connect terminals
 - Lifetime warranty
 - Now available with Disk Mag: US-A1DW
 - US-A1DBR


IntelliSense
3/8" Stubby Contact with Flat Magnet

- CK-MPS99WGW
- CK-MPS99WGB
 - 3/8" switch, stubby flat surface magnet
 - 1.25" wide gap (33mm)
 - Press fit
 - Lifetime warranty


Ademco
3/8" Diameter Press Fit Contact

- 951WG-WH
- 951WG-BR
 - Standard gap 1.25" (32mm)
 - 3/4" long magnet
 - 12" (30cm) leads
 - Ammo box packaging


Amseco
3/8" Press Fit Contacts

- AS-AMS17
 - 5/8" gap, 24" leads
- AS-AMS21
 - 5/8" gap, 24" leads
- AS-AMST21
 - 5/8" gap, terminal type


Ademco
Surface Mount Contact

- 7939WG-WH
- 7939WG-BR
- 7939WG-GY
 - Standard gap 1.25" (32mm)
 - Spacers, covers & screws included
 - Ammo box packaging
 - SPDT (Form C) model also available (7939-2SPDT)


Ademco
Mini Magnetic Contact

- 943WG-WH
- 943WG-BR
 - Standard gap 1.25" (32mm)
 - 12" (30cm) leads
 - Self-adhesive or screw mount
 - Ammo box packaging


Aleph
3/8" Press Fit Contact

- AL-DC1621WGW
- AL-DC1621WGB
 - 3/4" gap
 - Crush resistant
 - Rare earth magnet
 - W-I-D-E-R gap guarantee
 - Lifetime warranty



ADEMCO
Mini Surface Mount Contact

940WH

940BR

- 3/4" (19mm) gap is standard
- All wires & terminals can be completely hidden
- Mounting screws & spacers included
- Ammo box packaging
- Lifetime warranty


ADEMCO
Surface Mount Contact with Hinged Cover

PAL-T-WH

PAL-T-BR

- Standard gap is over 1.125" (29mm)
- Patented hinged case covers screws
- Screw or adhesive mounts
- 6 wire entry points
- Ammo box packaging
- Lifetime warranty



ADEMCO
Extra Transient Protection

7945WH

7945BR

7945GY

- Super 2.5" gap (64mm)
- Surge protected to 2400VDC
- 6" CL II jacketed cable standard
- Epoxy sealed



7945-2GY

- For SPDT (Form "C")


ADEMCO
Mini Surface Contact/Terminals

945T-WH

945T-BR

945T-GY

- Larger terminals
- Wide gap 1.25" (33mm) standard
- Ammo box packaging
- Lifetime warranty


ADEMCO
Universal Contact: Surface/Recess

7940WH

7940BR


- Super wide 2" gap (51mm)
- Screw, adhesive or recessed mount
- Quickwire IDC screw terminals
- Ammo box packaging
- Lifetime warranty


ADEMCO
Long Lead Adhesive Mount

945WH

945BR

- 1.25" (33mm) gap is standard
- 15' zip cord leads
- External test points
- Lifetime warranty



Also avail. Screw mount version


949WH \$3.03/3

949BR \$3.03/3


GE Security
Mini Flange Mount with Wire Leads


SR-1032

- Flanges for rapid mounting
- Includes adhesive mounting strips


GE Security
Miniature Surface Mount Contact

SR-1035

- Closed loop
- Wire leads
- Quick tape mounting: no screws or glue needed


GE Security
Surface Mount Terminal Contact

SR-1038T

- 1" gap
- Closed loop
- Low profile
- Angled terminal blocks for easy installation


GE Security
Industrial Screw Terminals

SR-1045T

- Used on steel without brackets
- Concealed terminals resist tampering and inadvertent shorting
- Rugged construction


GE Security
Industrial Surface Mount

SR-1045W

- Wide 3" gap
- Surface mount with wire leads
- Rugged construction


GE Security
Surface Mount Contact

SR-1085TWH

SR-1085TBR

SR-1085TGY

- 3/4" gap, Closed loop
- Easy clamp screw terminals
- Dispenser box packaging
- Cover, spacer & screws included
- Other available models include SPDT, wide gap, extra wide gap and biased for high security
- 5 year warranty


GE/Security
Surface Mount Contact with Terminal

SR-3025TM

- Self adjusts to proper reach
- Pulling out on plunger shunts switch
- Disconnection while servicing equipment is unnecessary
- Fits most control panel mounting hole patterns


GE Security
Surface Mount Contact with Terminals

SR-1138T

- Angled terminal blocks
- 1" gap distance
- Tape or screw mounting
- 2" L x .33" H x .38" D
- cULus Listed


Aleph
Surface Mount Contact

AL-DC3531W


AL-DC2541WGB

- 7/8" gap on steel door
- Screws, spacers & covers included
- W-I-D-E-R gap guarantee
- Lifetime warranty



GRI Standard Surface Mount Switch Set GI-29A

- Screw terminals, screw down flange, Closed loop
- Up to 1" standard gap, up to 1.5" wide gap, up to 2" extra wide gap
- Built-in end of line resistors available
- White, brown, gray
- Lifetime warranty



- ### GRI Miniature Surface Mount Series
- GI-5012
- Self-stick
- GI-50F12
- Flange, end leads
- GI-55F12
- Flange, center leads
 - Closed loop, 1/2" gap
 - Built-in end of line resistors available
 - White, brown, gray
 - Lifetime warranty



- ### Aleph 1/2" Surface Magnetic Contact
- AL-PS1541WGW
AL-PS1541WGB
AL-PS1541WGG
- 1/2" gap
 - Wire leads and self adhesive mounting
 - Lifetime warranty



GRI Miniature Surface Mount Switch Set GI-100T GI-110T

- Miniature profile for residential and light commercial, Closed loop
- Screw terminals & screw down flange or self-stick
- Up to 1" standard gap, 1.25"+ wide gap
- Built-in end of line resistors available
- White, brown, gray & almond
- Lifetime warranty



GRI Miniature Surface Mount Switch Set GI-10012

- Miniature profile for residential & light commercial, Closed loop
- 12" leads, screw down flange or self stick
- Up to 1" standard gap, 1.25"+ wide gap
- Built-in end of line resistors available
- White, brown, gray & almond
- Lifetime warranty




- ### Aleph 5/8" Surface Contact
- AL-PS1523BWG
AL-PS1523GWG
AL-PS1523WWG
- 5/8" minimum gap
 - Concealed mounting screws
 - Lifetime warranty



Amseco Surface Mount Contacts AS-AMS51CV

- 3/4" gap, covers included
- AS-AMS39CVS
- 3/4" gap, covers, spacer, screws



- ### Amseco Industrial Contacts
- AS-AMS37L
- 2" gap, 24" leads
- AS-AMS37LG48
- 2" gap, 48" leads
- AS-AMS37
- 2" gap, terminal type, SPST



- ### USP Micro Magnetic Contact
- US-90SPGY
US-90SPWH
- Dim.: 1" x .25" x .125"
 - .50" - .60" gap - closed circuit




Amseco Overhead Door Contacts AS-ODC59A


- SPST, 2" gap, 24" or 36" cable
- AS-ODC59B
- SPDT, 2" gap, 24" cable
- AS-ODC56A
- SPST, 2" gap, fixed magnet, 24" cable
- AS-ODC56B
- SPDT, 2" gap, fixed magnet, 24" cable



- ### Amseco Self-Stick Contacts
- AS-AMS10C
- 3/4" gap, 24" center leads
- AS-AMS10S
- 3/4" gap, 24" side leads
- AS-AMST10C
- 3/4" gap, center terminals



- ### USP Self-Stick Magnetic Contact
- US-130SPBR
US-130SPWH
US-130SPGY
- 1" gap
 - SPDT
 - Open & closed circuit
 - Lifetime warranty



GE Security 2200 Series Mini Surface Mount Contact SR-2202A SR-2205AU

- Mini, low profile design
- Stainless steel armored cable
- Small size less likely to be damaged by forklifts
- Wide working gap for overhead doors
- 5 year warranty



GE Security 2200 Series Mini Surface Mount Contact SR-2207AH

- Mini, low profile design
- Stainless steel armored cable
- Small size less likely to be damaged by forklifts
- Wide working gap for overhead doors
- 5 year warranty




GE Security Sectional Overhead Door Contact SR-2315AL

- 3" wide operating gap
- Integrated bracket to fit most channel sizes
- Quick & easy installation
- Lifetime warranty



USP
Mini Overhead Door Contact
 US-SP3000

- Extra wide 2.5" gap
- Waterproof & hermetically sealed
- Rugged construction



Also avail. US-SP3000A
 • With adjustable "L" bracket


GRI
Miniature Aluminum Commercial Switch Set
 GI-4460A

- Recommended for industrial use
- 1" + standard gap, Closed loop
- 18" armored cable or jacketed lead
- Resistant to vandalism
- Lifetime warranty


ADEMCO
Overhead Door Contact
 959

- With 2400VDC surge protect - 2" gap
- Lifetime warranty


USP HUB2 Series
Hold-Up Buttons
 US-HUB2A

- 3 screw terminal - DPDT

US-HUB2B

- 6 screw terminal

US-HUB2SA

- 3 solder terminal
- Momentary
- SPDT


USP
Hold-Up Rail
 US-COR2

- Foot activated hold-up rail
- DPDT latching switch
- Activate alarm, camera, or both at the same time
- Rugged stainless steel construction
- Rated voltage: 125/250
- Rated current: 10 amps
- UL Listed


IntelliSense
Overhead Door Contact
 CK-MPS52

- 2" gap
- .75" x 3.25"
- 1.9375" diameter
- Lifetime warranty


Amseco
Hold-Up Switches
 AS-HUSK10

- Metal, key resettable - SPDT

AS-HUS7A

- ABS housing - SPDT

AS-HUS1

- Metal tool resettable - SPDT


Amseco
Double Hold-Up Switch
 AS-HUSD15BL


- Latching
- 2 push buttons for activation
- Hidden mounting screws
- Terminal strips for easy wiring
- 125VAC 5 amps, 30VDC 5 amps

AS-HUSD15BM

- Momentary, double hold-up switch
- SPDT


ADEMCO
Overhead Door Contact
 958


- Nominal gap = 2" min
- 24" armored cable is standard
- Water resistant
- "Shock absorber" design protects reed against flex or damage
- Adjustable magnet with L-bracket for fast installation
- Lifetime warranty
- Also avail: 958-2 (SPDT)


GE Security
High Security with Armored Cable
 SR-2707A

- Triple Biased
- Virtually impossible to defeat
- Supervised loop, remote test and DPDT models available


GE Security
Maxi-Gap™ Contact
 SR-2515AL

- Closed loop, N/O
- Up to 6" gap
- 1.5" stainless steel armored cable
- Mounting hardware included
- 5 year warranty


ADEMCO
Hold-Up Alarm Switch
 269R

- Completely silent operation
- DPDT switch with screw terminal connectors
- Avail. for VPLEX® polling loop: 269SN
- 270R same as 269R in plastic case


GE Security
2500 Series Industrial Contact
 SR-2505AL
 SR-2507AH

- Wide gap distance decreased installation time
- 3' stainless steel armored cable
- Mounting brackets available
- 5 year warranty
- Garage door and gate mounting kits available


GE Security
Curtain Door Magnetic Contact
 SR-2302A

- 2' stainless steel armored cable
- Up to 3" gap distance
- Closed loop, N/O
- Mounting hardware included
- 5 year warranty


Potter
Hold-Up Buttons
 PL-HUBM

- 1 button, DPDT
- PL-HUBT
- 2 button, 2 DPDT contacts
- Both models standard momentary or latching




PL-HUBM




GE Security
ANSI High Security
with Armored Cable
SR-2757L SR-2767

- Triple Biased
- SR-2757 is approved for fire doors
- ANSI Recessed
- SR-2767 is adjustable
- DPDT models available




GE Security
Panic Switch Cold Temperature
SR-3040CTW

- Designed for walk-in coolers and freezers
- Internal circuitry encased in polyurethane
- Installs easily
- 5 year warranty



ADEMCO
High Security Contact
968XTP

- Balanced magnetic contact
- 3' steel cable
- Mounts on steel surface without spacer
- Integrated back tamper
- Surge protected to 2400VDC
- Indoor or outdoor use
- Lifetime warranty



Honeywell


GE Security
Special Purpose Bill Trap
SR-3555B

- Hides in bottom of cash draw
- Compact and self adhering, no drilling
- Black color to blend into background




GE Security
HD Magnapull™
Magnetic Pull-Apart Cord
SR-2105AG

- High-impact plastic housing
- Protects free-standing items stored outside
- Installs easily & quickly
- Lifetime warranty



ADEMCO
Extra Transient Protection
960

- Super 2.5" (64mm) gap
- Surge protected to 2400VDC
- 3' stainless steel armored cable
- Lifetime warranty
- SPDT available (960-2)



Honeywell

GRI
Resistor Pack
GI-6644

- Features 2 - 1K 1/8 watt resistors
- 2 black leads and 2 blue leads



GRI
Armored Disconnect Cable
GI-823025

- For use with GRI pull apart switches
- Quick connect/disconnect
- 1 male and 1 female connector on 25' armored cable
- Armored cable GI-831025 is white PVC coated to protect merchandise



E&E Electronic e-Plug-K
Alarm Prewiring Kits
EE-EE088PWK

NEW!

- Triple function plastic plug (100 pieces)
- Good for 3/4" or 1/4" recessed contacts
- High peak (120dB+) and low current (12VDC, 0.12A) siren (EE-518CLS 1-piece)
- Reduces installation time & protects against water penetration, provides spacing protection on metal frame installation



USP
Micro Magnetic Contact
US-90SPBR

- Dim.: 1" x .25" x .125"
- .50" - .60" gap - closed circuit



Mini Stick-On Contact
US-BP30

- .75" gap - closed circuit



United Security Products, Inc.

USP
Sealed Pressure Mats
US-903

- 18" x 24" sealed pressure mat
- US-904
- 24" x 30" sealed pressure mat
- US-909
- 24" x 36" sealed pressure mat
- US-925
- 25' x 30" Roll-cut to fit
- US-926
- 25' x 30" Roll-Pet resistant to 60lbs.



United Security Products, Inc.

ATW
Dual Tone Siren
PR-DS301SET

- 117 dB, 6-14 VDC, 1 A
- Includes 2 tamper & stainless steel enclosure
- Shown with optional PR-STL1 Series strobe
- CE approved
- 2 year warranty



ATW Security

ATW
Indoor/Outdoor Siren with Strobe
PR-DOBERMAN

- 105 dB, 6-14 VDC, 180 mA
- Strobe can be wired independently from siren
- Single tone piezo siren - warble
- Mounts on single gang box or surface mount
- CE approved
- 2 year warranty



ATW Security

ATW
Doberman Plus Indoor/Outdoor Siren & Strobe Combination
PR-DOBERMAN+

- 104 dB, 6-14 VDC, 140 mA @ 24VDC
- Tamper on back of unit
- Lens is clear - strobe flashes red
- Strobe can be wired independently from siren
- Single tone piezo siren - warble
- Mounts on single gang box or surface mount
- CE approved



ATW Security

ATW
Indoor/Outdoor Siren with Strobe
PR-POINTER

- 105 dB, 6-14 VDC, 180 mA
- Strobe activated with siren
- Single tone piezo siren-warble, CE approved
- Mounts on single gang box or surface mount
- 2 year warranty



ATW Security

UltraTech Sirens

- IM-SS15
- 15 watt siren
- IM-SS30
- 30 watt siren



UltraTech
POWER PRODUCTS

ADEMCO Electronic Siren 702

- 30 watt
- 6-12VDC
- Dual channel (warble or steady)
- Speaker and siren
- 2 year warranty



Honeywell

ADEMCO Sounder WAVE2

- 106dB 2-tone siren output
- Mounts horizontally or vertically
- Hinged cover snaps open & closed

WAVE
• 8 ohm/15W speaker



UL Honeywell

UltraTech Siren

- IM-SS36
- 4" Wall mount siren
- 8 ohm
- 6 -12VDC



UltraTech
POWER PRODUCTS

ADEMCO Indoor Siren 747

- 2 ch. siren, 15 watt wall mount
- 747F
- 2 ch. siren, 15 watt wall mount/flush
- 2 year warranty



Honeywell

ADEMCO Low Current Piezo Siren WAVE2EX

- Selectable output: 100mA @ 106db
- 60mA @ 100db
- Mounts horizontally or vertically
- Hinged cover for fast install



UL Honeywell

ATW Single Gang/Single Tone Piezo Siren PR-SGSTW

- 105 dB, 9.6-30 VDC, 20 mA @ 24VDC
- Steady single tone piezo siren
- Polarized for DC supervision
- Mounts into a single gang box
- CE approved



CE ATW Security

ADEMCO High Power Outdoor Siren 748

- 119dB output at 12VDC
- 2-tone signal (steady & warble)
- Fully tampered
- Compact size, weather resistant

Also Available: 748LC
• 112dB @ 550mA, fully tampered



UL Honeywell

ADEMCO Flush Mount Siren WAVE2F

- 106dB, 2-tone siren output
- Fits standard double-gang box
- Hinged cover for fast install



Also Avail.: WAVE-F
• 18 ohm, 15W speaker

UL Honeywell

ATW Indoor/Outdoor Siren PR-BLOODHOND

- 104 dB, 6-14 VDC, 90 mA
- Single tone piezo siren - warble
- Mounts in single gang box with 2 screws
- CE approved
- 2 year warranty



CE ATW Security

Revere Industries Heavy Duty Steel Siren Package RV-RVL36CSRNS

- 36 watt, dual tone, 12VDC, 900mA siren, 126dB
- Heavy gauge steel cabinet with baked-on epoxy finish
- Dual tamper switches
- Also available in stainless steel (RV-L36CSRNSC)



Revere Industries Heavy Duty Steel Speaker Package RV-R4400SSDP

- 44 watt dual tone 12VDC, 950mA siren, 136dB
- Heavy gauge steel cabinet with baked-on epoxy finish
- Dual reed tamper switches
- Pre-wired terminal strip
- Also available in speaker package (RV-R4400SP)



Revere Industries Outdoor Siren RV-RVL18SRN

- 2-channel siren with pulsing fire horn sound
- 18 watt, 12VDC, 600mA siren, 118dB output
- 360° rotational base, 135° tilt
- Predrilled face for mounting to soffits, louvers or vents



NEW!



Revere Industries Heavy Duty Steel Siren Package RV-RVL18CSRNS

- 18 watt, dual tone, 12VDC, 600mA siren, 118dB
- Heavy gauge steel cabinet with baked-on epoxy finish
- Dual tamper switches
- Also available in stainless steel (RV-L18CSRNSC)



Revere Industries Heavy Duty Steel Siren Package RV-R2200SSDP

- 22 watt, dual tone, 12VDC, 900mA siren, 125dB
- Heavy gauge steel cabinet with baked-on epoxy finish
- Dual reed tamper switches
- Pre-wired terminal strip



**ADEMCO
Indoor Speakers**

- 746
- 15 watt wall mount
- 746F
- 15 watt wall mount/flush
 - 2 year warranty


Honeywell
**ATW
Dual Tone 15 Watt
Surface Mount Siren
PR-DT24**

- 103 dB, 6-14 VDC, 400 mA
- Dual tone siren - steady & warble
- Compact design
- Indoor surface mount
- Quick & easy installation
- 2 year warranty
- CE approved


CE **ATW Security**
**GE Security
Speaker
SR-MPI8**

- 15 watts, 8 ohm
- Use indoor or out
- 3 year warranty


GE
**ADEMCO
Self-Contained
Outdoor Speaker
749**

- 8 ohm/25 watt (peak) power
- No cabinet required
- Fully tampered
- Can also be mounted to a 4" electrical back box
- 2 year warranty


UL **Honeywell**
**ATW
Indoor/Outdoor Siren
PR-BULLDOG**


- 105 dB, 6-14 VDC, 110 mA
- Single tone piezo siren - warble
- mounts on to single gang box or can be surface mounted with one screw
- 2 year warranty
- CE approved


CE **ATW Security**
**GE Security
Speakers
SR-MPI37**

- 2-channel, dual tone
- 6/12VDC
- Weather resistant
- 3 year warranty


UL **GE**
**Rokonet
ProSound Professional
External Sounders
RK-RS20WAP0A**

- Long-life SLT™ strobe (patent pending) combined with 106 dBA sounder
- Unique anti-foam, anti-drilling & anti-approach protection
- UV-trated weatherproof & vandal resistant polycarbonate housing



Also Avail.: RK-RS200WAP000A

- With anti-foam

ROKONET
**ATW
Designer Indoor Siren
PR-NEMESIS**

- 105 dB, 6-14 VDC, 100 mA @ 12VDC
- Exclusive design & hinge
- Single warble tone
- Easy installation with locking hinge or easy to remove faceplate
- Sleek look to mesh with its surroundings
- CE approved


CE **ATW Security**
**GE Security
Weatherproof Speaker
SR-MPI30**

- 30 watt normal, 50 watt peak
- 8 ohm
- Swivel mount bracket
- Built-in tamper loop
- 3 year warranty


GE
**E&E Electronic e-PANGUARD
Mini-Siren w/Back-Up Protection
EE-EE168S**

- Alarm siren with battery back-up capable
- Auto cut-off time selectable (3-8 min.)
- Phone line monitoring capable
- Micro control supervised range: 6-110VAC-DC
- Additional protected for alarm control, CCTV and electronic equipment etc.


E&E
**UltraTech
Speakers
IM-SP15**

- 15 watt speaker
- 30 watt speaker
- 8 ohm
- 6 -12VDC


UltraTech
POWER PRODUCTS

**GE Security
Self-Contained Speaker/Siren
SR-MPI38**

- 2-channel
- 6 or 12VDC
- 112 dB @ 10ft.
- Weather resistant
- 3 year warranty


GE


**ADI's
2006 Expo Series
is on the road again and
coming to a location near you.**

**Check the Expo Guide on page 8
or contact your ADI branch
for more info.**

**Amseco
Armored Siren
and Siren/Strobe Combination
AS-SSX51**

- Patented 15 watt/120dB indoor/outdoor armored siren
 - Operates on 6-12VDC
- AS-SSX51S**
- 15 watt indoor/outdoor armored siren/strobe combination
 - 60,000 candle power strobe
 - Operates on 12V DC • Beige housing
 - Amber, blue, clear or red


amseco
**GE Security
MPI-47 Series
Piezo Screammers
SR-MPI47B**

- Wall or ceiling mount with metal bracket
- SR-MPI47C
- Ceiling/flush mount
- SR-MPI47E
- Fits NEMA standard electrical box
- 110dB output


GE

Amseco VDS-208 Voice Siren Driver AS-VDS208

- 32 selectable modes
- 8 distinctive sound options
- Field selectable hi-low input levels



Stealth Labs Siren Driver YY-SD400

- Recordable YY-SD301
- Pre-recorded
- 2 recordable 10 sec. messages
- Combine for one 20 sec. message
- Fire & Intrusion messages in English & Spanish



GE Security Siren Driver SR-MPI11

- 2-channel: yelp and steady
- 6-12VDC




Altronix Siren Drivers AX-ALSD1

- 6-12VDC operation
- Low current drain
- Very loud 2-channel operation (steady and yelp)



FBII Siren Driver FB-F679S

- 3.5" x 3" 8 ohm speaker
- 6V & 12V
- Low current draw
- Steady & warble output
- Siren supervision with selected FBII control panels
- 5 year warranty



E&E Electronic VOXBOX Single Channel Voice Annunciator EE-EE518

- Self-contained, 20 second recording time
- On-board mic
- High density LED strobe
- 2 watt amp and 2 watt 3.25" speaker
- External speaker output, AC adapter and 9V battery back-up included
- NO, NC and Multiple trigger available



Revere Industries Indoor Sounder, Transformer, RJ-31X Cord & Jack Kit RV-PIKIT1

- Contains
 - *PI-IDSS Siren (400mA @ 12VDC, dual tone, surface mount)
 - *RT-1640SLM transformer (16.5VAC, 40VA w/LED & MOV surge protect)
 - *RJ31X-SET (3 ft. cord, spade-to-modular plug and block with 50 Microns of gold)



Revere Industries High Power Weatherproof Xenon Strobes RV-RSTA

- UL-94 flame retardant plastic, high strength, impact-resistant polycarbonate Amber lens
- 140mA @ 12VDC 150,000 candle power
- Supplied with 2 screws to surface mount to all REVERE and VALUE LINE speaker cabinets or any flat surface
- Also avail. in Red, Blue, Green or Clear



E&E Electronic VOXCON Natural Voice Annunciator EE-EE668VIF

- Stand alone/interfaced with most alarm control systems
- 6 channels, 15 seconds per channel expandable for larger systems
- Mic on board, 2 W amp on-board drive up to (8)-8ohm speakers (EE-EE6685PK)
- EE-EE6685PK mini speaker included



Crow GBDII Glassbreak Detector CW-GBD2

- Shock and/or breakage selectable
- 33ft. range
- Unique signal analysis ignores environmental disturbances
- Memory LED
- Sensitivity adjustments
- Ceiling or wall mount
- 5 year warranty



Crow Dual Pattern Glassbreak Detector with Dual Element PIR CW-SRPG2

- 33' detection range
- PIR dual elements to 60'
- Shock and breakage selectable
- Separate sensitivity adjustments
- Protect several windows with one detector
- ASIC Technology
- 2 relay outputs
- Residential/commercial applications



ADEMCO Motorized Bell AB12M

- UL grade A/mercantile
- 10" bell
- Low current draw



IEI Viper Plus Glassbreak Detector IE-834LBR

- IE-834LWH
- IE-834LCBR
- E-834LCWH
- With contact
- Piezo-electric sensor with custom ASIC microchip
- LED display
- Patented single or double knock option



Visonic PowerCode Supervised Wireless Glassbreak Detector VS-MCT501

- Compatible with PowerMax+ and PowerMax, VS-MCR304 and VS-MCR308 receivers



Visonic Glass Tech Glassbreak Detector VS-GTECH

- Recognizes difference of false & true alarms
- Digital Signal Processing (DSP)
- Continuous supervision and trouble indication
- Computerized Acoustic Image Recognition



ADEMCO
Wireless Glassbreak Detector
 5853

- Longer battery life
- Maximum detection while reducing false alarms:
* *Flexcore™ signal processing*
* *selectable sensitivity*
- Reduces installation time:
* *no mounting restrictions*
* *remote test mode*



UL Honeywell

IntelliSense
Glassbreak Detector and Mag Contact
 CK-FG1608

- Glassbreak and magnetic contact in one detector
- FlexCore signal processing
- Built-in reed switch with magnet
- Easy remote testing
- 5 year warranty



UL Honeywell

IntelliSense
FLEXGUARD®
Glassbreak Simulator
 CK-FG701

- Simulator and tester for *IntelliSense* glassbreak detectors
- Compatible with all Intellisense and Ademco series glassbreak detectors



Honeywell

IntelliSense
Glassbreak Detector
 CK-FG730

- 30' glassbreak detector
- Dual flex/audio technology
- Adjustable
- Alarm memory
- 5 year warranty



UL Honeywell

IntelliSense
FLEXGUARD™
Glassbreak Detector
 CK-FG1625R

- FlexCore™ signal processing
- 25' range
- Remote test activation
- Round case design
- Selectable sensitivity
- 5 year warranty



UL Honeywell

IntelliSense
FLEXGUARD®
Glassbreak Detector
 CK-FG1625

- 25' coverage
- FlexCore™ signal processing
- Remote test mode activation
- Selectable sensitivity
- 5 year warranty


 Also available: CK-FG1615
 For non adjustable 15' range version

UL Honeywell

IntelliSense
Glassbreak Detector
 CK-FG1025Z

- Two microphones with patented "Time of arrival" processing
- Sounds from the "excluded zone" are ignored
- 5 year warranty



UL Honeywell

IntelliSense
FLEXGUARD™
Recessed Glassbreak Detector
 CK-FG1625RFM

- 25' range
- Round flush mount design
- Remote test activation
- Selectable sensitivity
- Staggered "T" terminals



UL Honeywell

IntelliSense
FLEXGUARD®
Glassbreak Detector
 CK-FG1625F

- FlexCore™ signal processing
- 25' range
- Remote test activation
- Fits single gang electrical box
- Selectable sensitivity
- 5 year warranty



UL Honeywell

GE Security
ShatterPro™ 3
Acoustic Glassbreak Sensor
 SR-5812NT SR-R5812NT

- Adjustable to room size
- Easy-access design
- End-user can test sensor operation with a clap of the hands
- Alarm memory
- 5 year warranty



UL GE

GE Security
PinPoint Addressable Glassbreak
 SR-5845ID

- Addressable
- ShatterPro II glassbreak
- ShatterPro Pattern Recognition Technology
- Protects all types of glass up to 1/4" thickness
- Senses through light blinds & unlined drapes



UL GE

GE Security
Shatter Pro II
Recessed Glassbreak Sensor
 SR-5820AW

- 1" recessed mount
- 25' radius coverage
- Pattern recognition technology



UL GE

GE Security
Acoustic Glassbreak Detector
 SR-5812RND

- Adjustable to room size
- 3-25' x 360° detection range
- Clap hands to verify power on



UL GE

GE Security
Wireless Shatter Pro
 SR-584503W

- Compatible with 3-volt transmitters
- 20' (60m), 360° range to farthest point on all glass
- Protects all types of glass
- Pattern recognition technology



GE

GE Security
Audio Discriminator
 CA-2000

- 3 x 3 technology
- Power/status LED
- 25' radius coverage
- Acoustic grille design
- Microprocessor based



UL GE

GE Security Motion Sensitive Acoustic Glassbreak Sensor SR-5885W

- 24 hour acoustic glassbreak application
- Motion sensitive - so eliminates occupant-generated false alarms
- Functions as 2 sensors (PIR & glassbreak) in one package



GE Security Acoustic Glassbreak Detectors SR-5812AW SR-SPRES

- Small housing
- Protects all glass types
- Uses Pattern Recognition Technology



GE Security ShatterPoint™ Acoustic/Seismic Glassbreak Sensor SR-5620W

- Dual technology, plus mag contact
- Complete perimeter protection
- Protects all types of glass
- Up to 10' range



Rokonet ShockTecPlus™ Digital Shock Detector Plus Magnetic Contact RK-RK600SM0A

- Tri-color LED for accurate & reliable calibration
- Internal magnetic reed switch
- Magnet can be mounted on either side of detector up to a 20mm gap
- Dual stage adjustment
- Encapsulated piezo-electric sensor



Also available: RK-600S
ShockTec™ without magnetic contact



GE Security Single Gang Detector CA-2100

- Single gang flush mount
- 3 x 3 technology
- 20' radius coverage
- Automatically adjusts
- Microprocessor based



GE Security Glassbreak Detector CA-2200

- 3 x 3 technology
- Microprocessor based
- Alarm memory LED
- Power status LED
- 20' radius coverage
- Automatically adjusts



Rokonet VITRON Plus Glassbreak Detector RK-RG71FM

- Dual technology - 30ft. range
- Dead microphone supervision
- Flush (single gang/Gewiss), wall or ceiling mount
- Omni-directional microphone
- Protects all glass types: plate, tempered, laminated & wired



Also available: RK-RG65
Glass break simulator



GE Security Shock Sensor SR-5150W

- On-the-glass protection
- Low profile 1.25" x 1.25"
- Draws no power
- Use on 24 hour loops
- Protects all types of glass without sensitivity adjustment
- Up to 10' radius of coverage or 32 sq. ft.
- 5 year warranty



GE Security Safe and Vault Sensors SR-DV1201A SR-DV1221A

- Vault and safe seismic sensor
- ATM and night deposit seismic sensor
- Both sensors are superior protection
- False alarm resistant



USP Window Bug US-714G US-714W US-714B

- Up to 10' radius of coverage
- Protects up to 32 sq. feet
- Requires no power for operation



ADEMCO Shock Sensor ASC-SS1

- Protects all types of glass:
 - * plate
 - * tempered
 - * wired
 - * laminated
- Mounts directly to glass
- Epoxy sealed for water/condensation protection
- Draws <1mA current



Get the edge...the ADI edge!



www.adilink.com

Potter EVD Series Safe & Vault Vibration Detection PL-EVD1

- Stand alone
- UL Listed for ATM machines/safes

PL-EVD1C

- PL-EVD-1 w/hi-security safe door contact (Safe Pak)

PL-EVD2

- Expandable (up to 15 pick-up points)

PL-EVD2C

- Hi-security safe door contact (Safe Pak)



Potter Vault Sound Alarm System PL-VSAS

- Protection of reverberant & non-reverberant vaults
- PL-VSAS system consists of:
 - (1) PL-VSA amplifier
 - (2) mics, (1) 6V, 4Ah battery
 - (1) transformer
- Optional Accumulating Pulse Counter
- 2 to 10 microphones



Potter High Security Door Contact PL-HSC1

- Triple biased
- SPDT reed alarm switch
- Hidden pry tamper, SPDT
- Magnetic field tamper output
- Indoor/outdoor use



IntelliSense
Intellitemp Temp Switch
CK-T1000

- Calibrated probe & electronics
- Bright 3 digit display
- Remote probe & cable included
- Low current consumption



Honeywell

ADEMCO
Dual Temperature Sensor
TS300

- Use both local and remote probes
- Programmable hysteresis and alarm delay
- Alarm memory
- Local sensor 32° F to 140° F
- Remote probe -40°F to 140°F (T280R or TS300R)



Honeywell

GRI
Single Sensor Temperature Sensor
GI-T8800

- Single sensor in the appliance or connected remotely
- Simple to set - no software program required
- Min/Max temperature with probe: -40°F ~ 185°F
- without probe: -10°F ~ 176°F
- 1 year warranty



BlueGrass
Digital Temp Switch
FB-T280

- 12-18 VDC
- Local/Remote & C/F unit selection
- Programmable alarm output delay (0~255 minutes)
- Push button programmability
- 5 year warranty



Honeywell

Apex
Temperature Sensor
XP-TS16

- Sensing range: 32°~158°F
- Can be used for temperature display and auxiliary output announcement



Honeywell

GRI
Single Sensor Humidity Sensor
GI-H8800

- Senses & reports relative humidity
- Single sensor in the appliance or connected remotely with probe
- Simple to set - no software program required
- Humidity range is 5% to 95% +/- 5%
- 1 year warranty



Winland
ENVIROALERT
Multisource Environmental Alarm

- WI-EA200
- Dual zone with onboard & remote monitoring
- WI-EA400
- 4-zone monitoring of remote sensors
- Simultaneously monitors temp, humidity & water sensors
- Temp & humidity alarm set points
- 8 event alarm memory
- Adj. time delay - 1 to 120 minutes



GRI
41° Fixed Temperature Sensor
GI-T8005

- General temperature sensing
- 6" leads
- 41° trip temperature
- One year warranty



GRI
Programmable Temperature Monitor
GI-THERSTAT3
GI-THERSTAT4

- Programmable Hi/Lo temp limits
- Up to 3 additional probes
- Local temp range: 32° - 120°F
- Also monitors water sensor/door contacts



Preferred Technologies Group
Cartell Driveway System
PF-CT2B
PF-CT8

- Control unit detects 4 locations and annunciates 12
- PF-CT8 Annunciator Volume Control dual tone available
- Driveway Sensor with custom length cable



PF-CT2B



PF-CT6 Sensor for both systems

PF-CF2C
PF-FC9

- Control unit detects 100 locations and annunciates 12
- PF-FC9 Annunciator four function plate dual tone available
- Floodlight control
- Photocell light-block
- Driveway Sensor with custom length cable



Optex Wireless1000
Indoor/Outdoor Chime System
OP-RCTD10U

- 9VDC battery powered indoor/outdoor PIR
- Maximum 50' detection range
- 3 channel & tones identify transmitter 4th tone for latching alarm mode
- Annunciates up to 12 transmitters
- 1000' line of sight transmitter range




OPTEX

Mier Products, Inc.
Wireless Drive-Alert Driveway Series of Vehicle/Metal Detection Systems

- When the WIRELESS/CABLELESS sensor detects moving metal, it transmits a signal to the control panel.
- NO false alarms from animals, wind etc. The sensor will detect moving vehicles in driveways, drive-up windows or other areas you wish to monitor.
- The sensors are tamper-proof and will help protect homes, equipment, businesses, barns and/or land

Five brand new models:
BW-DA600

- Sounds whistle in control panel when the wireless sensor detects moving metal
- BW-DA601
- Activates a speaker within the control panel with a pre-recorded message (re-recordable)
- BW-DA603
- Activates remote chimes
- BW-DA604
- Activates remote chimes & lights
- BW-DA660
- Long range antenna boosts range up to 1/2 mile



NEW!
WIRELESS SYSTEMS!

- Each system comes with one control panel and (1) BW-DA610 wireless sensor/transmitter
- Can use an unlimited number of sensors
- Sensor detection range is adjustable from 7-30 ft.
- Transmits up to 1000 ft.



Mier Products, Inc. Drive-Alert Driveway Alarm System BW-DA500

- Detect moving vehicles in driveways, monitored areas, or at drive-up windows
- 1 control panel, 1 sensor and 100 feet of cable
- Alarm whistle
- Other lengths of cable available
- Drive-up window annunciator & other accessories available
- Accessories available



Mier Products, Inc. Chime-Alert for the Drive Alert of Vehicle Detection Systems Series BW-DA655

- The most popular accessory for Drive-Alerts
- Perfect for drive-up window applications & other high traffic areas
- Provides a pleasant chime when the Mier Drive Alert detects a vehicle
- Volume control included
- Very easy to install



Winland Electronics VAL-1 Vehicle Alert System WI-1172

- Includes: console, sensor, transformer & 100' cable
- 2 auxiliary Form A relays for switching on lights, alarms, cameras, X-10 etc.
- Adjustable sensor sensitivity
- Use up to 2 underground sensors



Sure Action Complete Directional Probe System SU-P8000C

- Discriminatory to inbound/outbound traffic
- Processors used: 212 only (12VDC)
- Requires 22/4 shielded direct burial wire with drain
- Splice friendly up to 1 mile
- Use when there is a different area for inbound vs. outbound vehicles



Safety Technology Driveway Monitor Deluxe SF-AM504

- Alerts you when a vehicle enters your driveway (detects metallic objects)
- Will not be triggered by animals, people or shadows
- Up to 500 ft. range between transmitter and receiver
- Add'l transmitters can be added to system
- Transmitter has low, medium and high sensitivity level



Winland Water Bug WI-WB200

- Provides warning when water is present
- Use in conjunction with alarm panel or telephone communicator
- Each control can run up to six sensor probes
- 12 or 24 VDC or AC required



GRI Liquid Level Detector GI-2826FS

- Failsafe
- Detects non-volatile liquids
- For use with wireless transmitters
- Form C relay contacts
- One year warranty



GE Security Moisture Sensors SR-5501

- Moisture processor, use with sensors
 - Ships with 2 lithium batteries
 - Accommodates up to 4 sensors
- SR-5515
- Surface mount sensor



HAI Environmental Sensors 2H-31A007

- Indoor/out door temp sensor
- Temp and humidity sensor
- Water temp sensor & probe
- Monitor, display, set high and low alarm and control settings for all HAI Omni Systems
- Extended range



GRI Water Sensor GI-2600

- Detects non-volatile liquids
- Normally Closed for a Closed loop circuit
- 12VDC, 1 amp max carry current
- One year warranty



Sure Action Complete Battery Operated Probe System SU-WP4C

- Non-discriminatory to inbound/outbound traffic
 - Requires any P500 Series Probe
 - Processors used: SU-WP4 only (9 VDC)
- SU-WP4 - Processor only
SU-WP4B - Pkg. w/no wireless included
SU-WP4C - Pkg. w/Innovonics - 2000ft.
SU-WP4CIR - Pkg. w/Innovonics - 4000ft.
- Used when trenching is impractical or undesirable



**ADI is offering
paperless
invoicing.**

**Contact your ADI representative
for more information.**

GRI 50° Fixed Temperature Sensor GI-T8050

- General temperature sensing
- 6" leads
- Closed above 50° activation temperature
- White only
- Lifetime warranty



Sure Action Enhanced Pulsor + (Stress Sensor) SU-ENHP+

- Invisible - mounts under floor or decking
- Fully adjustable sensitivity
- Average area of detection is 7 x 4 oval
- Uses SU-111 or SU-313 processors only
- High Performance Pulsors also available (SU-HHP, SU-HHP6 + & SU-HPP12+)
- Available in 6 pack & 12 pack (SU-ENHP6 & SU-ENHP12+)



Cellar Saver Sump Pump Warning Device C5-CS2029W

- Easy to install
- Easy to change contact
- Very low maintenance
- Form C relay
- Trouble-free open design



CELLAR SAVER

Duracell Procell Alkaline Batteries

- E4-PC1300
- "D" alkaline battery
- E4-PC1400
- "C" alkaline battery
- E4-PC1500
- "AA" alkaline battery
- E4-PC1604
- 9V alkaline battery
- E4-PC2400
- "AAA" alkaline battery



DURACELL
PROCELL

Duracell Lithium Battery

- E4-DL123ABPK
- 3.0 volt lithium battery



DURACELL

ADEMCO Monobloc Battery by Gates

- 465-627
- 6V, 2.7Ah
- 8-10 year float life, sealed design
- 465-654
- 6V, 5.4Ah
- 8-10 year float life, sealed design



Honeywell

Energizer Industrial Alkaline Batteries

- ZI-EN22
- 9V alkaline battery
- ZI-EN91
- "AA" alkaline battery
- ZI-EN92
- "AAA" alkaline battery
- ZI-EN93
- C alkaline battery
- ZI-EN95
- "D" alkaline battery



ENERGIZER

Energizer e² Lithium Batteries

- ZI-EL123APBP
- 3V photo battery
- ZI-L91BP4
- 1.5V "AA" battery - 4 pack
- ZI-L92BP4
- 1.5V "AAA" battery - 4 pack
- ZI-L522FP
- 9V battery - plastic case
- ZI-L522MJ
- 9V lithium battery - metal case



ENERGIZER

ADEMCO Lithium Batteries

- 465
- 9V lithium battery
- 465PAK
- 6 pack of 465 9V lithium batteries
- 466
- 3V lithium CR123A batteries
- 466KT
- 5 pack of 466 3V lithium batteries
- CR2430
- 3V coin cell for 5804BD & 5802MN2
- CR2025
- 3V coin cell for 5804 keys
- CR2032
- 3V coin cell for 5802MN



Honeywell

EnerSys Genesis Rechargeable 6 Volt Sealed Lead Acid Batteries

- YA-NP126
- 1.2Ah, 6 volt battery
- YA-NP46
- 4Ah, 6 volt battery
- YA-NP76
- 7Ah, 6 volt battery
- YA-NP106
- 10Ah, 6 volt battery



ENERSYS

EnerSys Genesis Rechargeable 12 Volt Sealed Lead Acid Batteries

- YA-NP1212
- 1.2Ah, 12 volt battery
- YA-NP2312
- 2.3Ah, 12 volt battery
- YA-NP412
- 4Ah, 12 volt battery
- YA-NP712
- 7Ah, 12 volt battery



ENERSYS

EnerSys Genesis Rechargeable 12 Volt Sealed Lead Acid Batteries

- YA-NP1812B
- 17.2Ah, 12V battery
- YA-NP2412
- 24Ah, 12V battery
- YA-NP3812B
- 38Ah, 12V battery



ENERSYS

UltraTech Sealed Lead Acid Battery

- IM-1213
- 12 volt, 1.3Ah battery
- IM-12180
- 12 volt, 18Ah battery
- IM-12240
- 12 volt, 24Ah battery
- 2 year warranty



ADI EXCLUSIVE!

UltraTech
POWER PRODUCTS

Power-Sonic Sealed Lead Acid Rechargeable Batteries

- PW-PS1270
- 12 volt, 7.0Ah battery
- PW-PS12120
- 12 volt, 12.0Ah battery
- PW-PS12180NB
- 12 volt, 17.5Ah battery
- PW-PS12260F
- 12 volt, 26.0Ah battery



POWER PS SONIC

Power-Sonic Sealed Lead Acid Rechargeable Batteries

- PW-PS1208WL
- 12 volt, 0.8Ah battery
- PW-PS1212
- 12 volt, 1.2Ah battery
- PW-PS1220
- 12 volt, 12.0Ah battery
- PW-PS1250F1
- 12 volt, 5.0Ah SAMP battery



POWER PS SONIC

UltraTech Sealed Lead Acid Battery

- IM-1240
- 12 volt, 4Ah battery
- IM-1270
- 12 volt, 7Ah battery
- 2 year warranty



ADI EXCLUSIVE!

UltraTech
POWER PRODUCTS

Power-Sonic Sealed Lead Acid Rechargeable Batteries

- PW-PS640F1
- 6 volt, 4.5Ah battery
- PW-PS670
- 6 volt, 7.0Ah battery
- PW-PS6100F2
- 6 volt, 10.0Ah battery
- PW-PS6360F2
- 6 volt, 36.0Ah battery



POWER PS SONIC

Power-Sonic Sealed Lead Acid Rechargeable Batteries

- PW-PS12330
- 12 volt, 33.0Ah battery
- PW-PS12550U
- 12 volt, 55.0Ah battery
- PW-PS12750NB
- 12 volt, 75.0Ah battery
- PW-PS121000
- 12 volt, 100.0Ah battery



POWER PS SONIC

Tripp-Lite BC Series Standby UPS System

- TC-BCPERS300
- 300VA UPS with 3 outlets
- TC-BCPERS450
- 450VA UPS with 3 outlets
- TC-HT1500UPS
- 750VA UPS
 - Excellent for home theater applications



Tripp-Lite BC Pro Series Standby UPS Systems

- TC-BCPRO600
- 600VA, USB port
- TC-BCPRO1050
- 1050VA with USB port
 - 6 outlet with software
- TC-BCPRO1400
- 1400VA with USB port
 - 6 outlet with software



GE Security Charger/Power Supply Complete

- SR-CH12AC
- 6, 12 or 24V




Also available: MP-CH12A

- Board only



Tripp-Lite True On-Line Pure Sine Wave

- TC-SU1000RTX
- TC-SU1500RTX
- TC-SU2200RTX
- TC-SU3000RTX
- TC-SU6000RT3
- TC-SU10KRT3U
- Zero transfer time to battery
 - Extended runtime capability



Tripp-Lite Smart Pro UPS

- TC-SMT15002A
- 1500VA, 8 outlets
 - 2U in height
 - RS232 & USB port
 - Line conditioning
 - Extended run time available with additional battery packs



Also avail:
2200VA, 3000VA & 5000VA



GE Security Complete Power Supply

- SR-HCP12SAC
- 12V, 7AH battery
 - 18V, 45VA transformer
 - 2A continuous



ADEMCO AdPower® Power Supplies

- AD25624
- Continuous 2.5A output
 - 12 or 24VDC operation
 - Use #N1330 transformer for 2.5A output/12VDC
 - Use XF30 transformer for 24VDC



Honeywell

ADEMCO AdPower® Power Supplies

- AD12612
- Continuous 1.2A output
 - 6 or 12VDC
 - Use #1361 transformer



Honeywell

GE Security Smart Power Supply and BUS Extender

- CA-NX320E
- 2 amp power supply module for NetworX panels



HSI Fire & Safety Group THEON Surge Suppressor Filter with Ground Transient Terminator

- HO-H9THEON
- Hardwire 120VAC surge suppressor/filter with GTT ground transient protection
 - Utilizes a multi-stage surge suppression
 - 60,000 amps of surge suppression



HSI Fire & Safety Group Ground Transient Terminator

- HO-H9GTT
- Eliminates ground transients
 - Compliments all surge suppression devices
 - Small size, easy hardwired installation, affordable cost
 - Fast, reliable linear response time



GE Security Power Supply

- SR-HCP12SUL
- Board only
 - 12 or 24VDC capability



Also available: MP-HCP12SULC

- Complete with enclosure



IEI PIP™ Plug-In Power Supplies

- IE-PIP12VDC
- IE-PIP24VDC
- Plug-in power supplies
 - Available and AC/DC output
 - Transient protection
 - Auto-resetting poly-fuses
 - LED power output indicator



Dynalock Power Supplies

- DY-5500
- 3 amp
- DY-5600V12 DY-5600V24
- 10 amp
 - Up to 10 zones expansion modules
 - Built-in battery charging circuit
 - Emergency lock release mode
 - Filtered & regulated - 12 or 24V output
 - DynaLife™ Lifetime warranty



Securitron PM Series Power Supply

- SN-PM121
- SN-PM241
- 1 amp DC power supply using plug-in transformer which is included
 - Fire alarm interface for AC fused, DC automatic instant drop out circuit breaker
 - Battery charging up to 20Ah
 - Lifetime warranty



Minuteman UPS MN Series R1-MN525

- 525 Va - 275 watts
- 6 outlets
- Software shutdown
- 3 year warranty



MINUTEMAN
UNINTERRUPTIBLE POWER SUPPLY

Direct UPS JPX/Jupiter Pro X Series Direct UPS 4A-JXP Series

- IPure Sinewave output with AVR
- Extended 24 hr. backup battery
- Rack mount capability

4A-JPX1500/RM 4A-JPX1500/2000EBM
4A-JPX2000/RM 4A-JPX3000 EBM
4A-JPX3000/RM



Advanced Signaling 5 Amp DPDT Relay Board AI-ASRB1X5

- 12 or 24VDC operating voltage
- 40mA coil operating at 12 or 24VDC
- Fire retardant case, 2" x 2" x 4"
- Max contact switching voltage: 30VDC or 250VAC



Advanced Signaling
CONTACT RELAY

Minuteman UPS MN Series R1-MN325

- 325 VA - 185 watts
- 4 outlets
- Wall mountable
- 3 year warranty



MINUTEMAN
UNINTERRUPTIBLE POWER SUPPLY

Direct UPS Vesta Pro Series Line Interactive UPS System

4A-VP600 4A-VP1400
4A-VP800 4A-VP2000
4A-VP1000

- Equipped with Boost and Buck AVR to stabilize input voltage
- Provides Modem/phone line surge protection
- Smart RS-232 communication



Advanced Signaling Relay Board AI-ASRB1

- 25mA
- Maximum voltage (30VDC or 120VAC)
- 6, 12 or 24VDC operating voltage
- 2A max. control switching current



Advanced Signaling
CONTACT RELAY

MINUTEMAN UPS Enterprise 1500 Uninterruptible Power Supply R1-E1500

- 1500VA, 900 watts
- Rack mount, tower, wall mount
- Extended run time
- True sine wave



MINUTEMAN
UNINTERRUPTIBLE POWER SUPPLY

Altronix Power Supply/Chargers AX-SMP3

- 2.5 Amp
- 6, 12, or 24VDC output
- DIN rail and snap track compatible

AX-SMP5

- 4.0 Amp
- 6, 12, or 24VDC output
- DIN rail and snap track compatible

AX-SMP7

- 6.0 Amp - 12 or 24VDC output



Altronix®

Altronix Power Supply/Charger Kits AX-AL624

- Board only
- 1.2 amp @ 6 or 12VDC
- 750MA @ 24VDC

AX-AL624ET

- AX-AL624 in enclosure with transformer for 12V operation

AX-AL62412C

- Transformer & 12V, 4Ah battery
- Lifetime warranty



Altronix®

Altronix Linear Power Supply/Charger AX-LPS3

- 2.5 amp continuous @ 12 or 24VDC
- 5 amp output on demand



Also available:

AX-LPS3C12X - in cabinet w/xfmr (12VDC)
AX-LPS3C24X - in cabinet w/xfmr (24VDC)

Altronix®

Altronix Relay Module AX-RBSN

- 12 or 24VDC operation
- 2 amp DPDT contacts
- 1,000 ohm coil draws only 10mA
- Snap track mountable



Altronix®

Altronix Break Away Relay AX-RB610

- 12VDC or 24VDC selectable operation
- 10 amp/120VAC/28VDC SPDT contacts
- Coil draws 50mA
- Cluster contains six (6) relay modules which can easily be separated



Altronix®

Altronix Power Supply/Charger AX-SMP10

- 10.0A continuous output @ 12 or 24VDC
- Zero voltage drop when switching over to battery



Also available:

AX-SMP10C12X - in cabinet w/xfmr (12VDC)
AX-SMP10C24X - in cabinet w/xfmr (24VDC)

Altronix®

Altronix High Current Power Supply AX-AL1024ULX

- Fire & Access applications
- 24VDC @ 10 amps on alarm
- 24VDC @ 8 amp continuous supply current
- AC fail & battery trouble reporting
- Zero voltage drop when switching to stand-by battery



Also avail.: AX-AL1012ULX
12 VDC output @ 10 amps



Altronix®

Altronix Hi Current Power Supply/Charger AX-LPS5C12X

- 120 VAC input
- 3.5 amp continuous supply current @ 12VDC
- Linear design



Also available: AX-LPS5C24X
• Same with 24VDC output

Altronix®

Security Door Controls 1 Amp Power Supply SZ-602RF

- Selectable 12/24VDC
- Low battery disconnect
- Input, output and battery status
- Fire alarm release with selectable auto or manual reset
- Output precisely maintained at 12 or 24VDC when charging
- Multiple outputs optional



Altronix High Current Power Supply/Charger AX-SMP16P12X

- 16 amps continuous supply current @ 12VDC
- Zero voltage drop when switching to battery
- Separate Form C relay contacts to report AC fail and low battery



Altronix Multi-Output Power Supply/Charger AX-400ULPD8

- 12VDC @ 4 amp or 24VDC @ 3 amp supply current
- Eight (8) individually fused protected outputs
- Class 2 Rated power limited outputs
- AC fail, low battery and battery presence monitoring



Security Door Controls 2 Amp Power Supply SZ-632RF

- Selectable 12/24VDC
- Low battery disconnect
- Input, output and battery status
- Fire alarm release with selectable auto or manual reset
- Output precisely maintained at 12 or 24VDC when charging
- Multiple outputs optional



Altronix Power Supplies/Chargers AX-AL400ULX

- 12 or 24VDC Class 2 output
- 4A @ 12VDC, 3A @ 24VDC
- UL Listed for Burg, Fire, Access Control and Nurse Call



AX-AL600ULX

- 12 or 24VDC output @ 6A
- UL listed for Fire & Access Control



Altronix VB1 Voltage Booster AX-VB1

- Converts a 12/24VDC to 24 VDC @ 0.75 amp regulated output
- Modular connector/cable assembly
- Compensates for voltage drops due to long wire runs


AX-VB1T

- Same as AX-VB1 with screw terminals



MG Electronics 9 Camera, 12 VDC UL Listed Power Supply MB-DPS12DC9UL

- 9 regulated 12VDC outputs
- Resettable PTC protection
- Individual power indication
- Also available 4 & 16 camera
- UL Listed



Leviton Online Series UPS

- LV-U1000VNL
- LV-U1000VRM
- Tower/racks 1000 VA
- LV-U2000VNL
- LV-U2000VRM
- Tower/racks 2000 VA
- LV-U3000VNL
- LV-U3000VRM
- Tower/racks 3000 VA



Leviton Slim Series UPS

- LV-U0500AKP
- 500 VA
- LV-U0600ARM
- 600 VA
- Line interactive UPS racks
- 1 unit in height - 5 outlets



MG Electronics 16 Camera, 24 VAC UL Listed Power Supply MB-DPS16UL

- 16 24VAC outputs
- Resettable PTC protection
- Individual power indication
- Also available 4 & 9 camera
- UL Listed



Leviton Pro Series UPS

- LV-U0425AKP
- 425 VA
- LV-U0625AKP
- 625 VA
- LV-U1000AKP
- 1000 VA
- LV-U1500AKP
- 1500 VA



Leviton Universal Power Supply LV-47605PSA

- Power connectors for up to 9 devices
- 12 VDC
- Short circuit overload and surge protection
- EMI/RFI filtering to connected equipment



Tripp-Lite BC Series Standby UPS System

- 500VA UPS RJ11 unit TC-IO500
- 700VA UPS 2 line modem TC-INTNT750U
- 750VA, 8 outlets, USB & TEL DSL ports



Tripp-Lite Smart 500 RT1U Line Interactive UPS Systems

- 1U in height
- 500VA with 6 outlets
- Software included
- SNMP/Web card access slot
- Wall and rack mount ability



Edwards Transformer ED-598

- 120V, 50/60Hz (primary)
- 8V, 20VA (secondary)
- 16/24V, 30VA (secondary)
- Higher power for longer wire runs



Amseco 40VA/50VA LED Resettable Transformers

- AS-XF1640
- 16.5 VAC, 40VA output
- AS-XF2440
- 24 VAC, 40VA output
- AS-XR1640LED
- 16.5 VAC, 40VA output
- AS-XF1650
- 16.5 VAC, 50VA output



UltraTech TransformersIM-

- 12V40VA
- 12VAC, 40VA
- IM-16V40VA
- 16VAC, 40VA
- IM-24V40VA
- 24VAC, 40VA



ADEMCO Plug-in Transformer 1361X10

- Controls X-10 devices
- For use with
 - * Vista-15P
 - * Vista-20P
 - * Vista-128BP
 - * Vista-128FB
 - * Vista-250BP
 - * Vista-250FB



Altronix Transformers

- AX-T24130
- 24VAC/100VA (4 amp) supply current
- AX-T24175
- 24VAC/175VA (7.25 amp) supply current
- AX-T2428300
- 24VAC/300VAC (12.5 amp) or 28VAC/280VAC (10 amp) supply current
- AX-T24130C
- 24VAC/100VA (4 amp) supply current in enclosure



Altronix Transformers

- AX-2885
- 28VAC/100VA (3.5 amp) supply current
- AX-T28140
- 28VAC/175VA (6.25 amp) supply current
- AX-T28140C
- 28VAC/175VA (6.25 amp) supply current in enclosure
- All can be used w/SMP Series Power Supplies



ADEMCO Transformer Power Supplies 1451-24

- Transformer in red cabinet for fire applications



Revere Industries 16.5VAC Class 2, 50VA Grounded Plug-in Transformer

- RV-RTG165SLM
- 16.5VAC, 50VA, grounded plug-in, Decorator white, with LED & MOV surge protection
- Screw terminals with washers, built-in cable strain relief
- Also available in 20VA (RV-RTG162SLM) 40VA (RV-RTG1640SLM)
- Ungrounded also available



Revere Industries 16.5VAC Class 2 40VA Grounded Plug-in Transformer

- RV-RTG164SLM
- 16.5VAC, 40VA, grounded plug-in, Decorator white, with LED & MOV surge protection
- Screw terminals with washers, built-in cable strain relief
- Also available in 20VA (RV-RTG162SLM) 50VA (RV-RTG165SLM)
- Ungrounded also available



Revere Industries 24VAC Class 2 40VA Resettable Plug-in Transformer

- RV-RT244SLM
- 24VAC, 40VA, resettable plug-in, Decorator white, with LED & MOV surge protection
- Screw terminals with washers, built-in cable strain relief
- Also available in 16.5VA (RV-RTR164SLM)



GRI Current Controller GI-CC01

- Lamp switching
- Closets, pantries, cabinets
- Automatic AC voltage switching
- Open Loop switch included
- One year warranty



DITEK Fire Panel Surge Protector DK-120S15A

- Series hybrid design - 4 stages of protection for quick & maximum protection
- User replaceable fuse
- Multiple diagnostic indicators
- RFI/EMI filtering
- Meets government & military spec for fire panels
- Also available in 20 amp version (DK-120S20A)



DITEK Modular Voice, Data & Signal Surge Protector DK-2MHLP Series

- Protects fire alarm notifying, initiating & SLC circuits
- Perfect for multiple terminations of control, data & signal wires
- 3-stage hybrid design
- Avail. in 8 voltages (5, 12, 24, 36, 48, 70, 90, 110)
- 10-position hardwired edge card base with modular surge suppression



Tripp-Lite IBAR Series Rackmount Surge Suppressors

- TC-ISOBAR12
- 12 outlets, 1U
- TC-ISBAR1220U
- 8 outlets, 20A, 1U



DITEK Hardwire 120 Volt Surge Protector DK-DTK120HW

- Recommended by major alarm panel manufacturers to protect the 120 volt power to fire alarm power
- Parallel connection maintains power to system
- Diagnostic indicator confirms ground presence, unit function and power on
- Small footprint



DITEK Plug-in AC Power & Telco Surge Protector DK-DTK1F31X

- Designed for residential alarm applications where Telco ground is not easily accessible
- Protects telephone & dialer in 1 unit
- 2 pr. in/out screw terminal for tip & ring
- X-10 compatible - won't interfere with RF signal
- Diagnostic indicator



Tripp-Lite Power Verter® DC to AC Inverters

- TC-PV150
- 150W
- TC-PV375
- 375W
- Cigarette lighter interface for fleet/personal vehicles



Tripp-Lite Protect It! Surge Suppressors

- TC-TLP602
- 6 outlets, 2' cord
- TC-SUPER7
- 7 outlets, 7' cord
- TC-SUPER7TEL
- 7 outlets, 7' cord, modem/fax
- TC-TLP808
- 8 outlets, 8' cord
- TC-T808TELT
- 8 outlets, 8' cord, modem/fax, coax
- Lifetime warranty



Tripp-Lite Isobar® Premium Surge Suppressors

- TC-ISOBLOCK
- Direct plug-in, 2 outlets
- TC-ISOBAR26
- 6' cord, 2 outlet
- TC-ISOBAR46
- 6' cord, 4 outlet
- TC-ISOBAR66
- 6' cord, 6 outlet
- TC-ISOBARDBS
- For satellite & Web TV,
- Lifetime warranty



Tripp-Lite OmniSmart® Line-Interactive UPS Systems

- Don't leave your customers caught in their dark. Affordable Battery Back-UPS for every application including DVR/VCR's, cameras, monitors, alarms, access control, home theater, phone systems, computer devices, switches
- Contractors prefer Tripp-Lite! All OmniSmarts feature battery back-up, automatic voltage regulation, line conditioning and surge protection and range from 300-1400VA (180-1000W)
- All units have 6 outlets with USB port and come with PowerAlert software

- TC-OMSMT300
- TC-OMSMT500
- TC-OMSMT700
- TC-OMSMT1050
- TC-OMSMT1400



Tripp-Lite OMNI "Value Series" UPS System

- TC-OMNIVS1K
- 1000VA battery back-up
- TC-OMNIVS15K
- 1500VA battery back-up, expandable run time
- TC-OMNIVS800
- 800VA battery back-up
- All units include USB port, RJ-style TEL/DSL port



Altronix Relay Modules

- AX-RBST
- 6, 12 or 24VDC operation
- 2 amp DPDT contacts
- AX-RBUL
- 12 or 24VDC operation
- SPDT 1 amp contact
- AX-RBTUL
- 12 or 24VDC operation
- SPDT 1 amp contact, 2mA trigger



AX-RBUL



AX-RBTUL



E&E Electronic e-Charger Multiple Back Up Battery Charger & Maintainer Kits EE-EE888K

- Kit includes: control unit with transformer, charge distributor, alligator clips, charge tester
- Extends battery life
- Charge rate auto-control
- 12/24 Volt selectable & shorting protection



ACT Meters 12V Spike Suppressor B6-ACT1313

- Prevents false alarms caused by electrical spikes
- Suitable for all makes of intruder alarm panels
- Connects between 12VDC supply and earth
- Quick & easy to install



ACT Meters 110V Mainspike Suppressor B6-ACT2323

- Prevents false alarms caused by electrical spikes
- Suitable for all 110V security equipment
- Provides up to 4,500 amps spike protection
- Simply installs between Live, Neutral & earth



ACT Meters Intelligent Battery Tester B6-GOLDIBT

- Award-winning features:
- Simulates full battery discharge test in seconds
 - Tests 12V SLA batteries & car batteries from 1.2Ah - 200Ah
 - Displays Ambient Temperature, DC Voltage & Ampere-hour Capacity available
 - Quick, accurate and easy to use



Leviton 12VDC Power Supply LV-47605PSB

- 3 power connectors provide up to 10 watts of power
- 12VDC
- Short circuit overload and surge protection
- EMI/RFI filtering to connected equipment



Leviton Rack Mount Surge Suppressor LV-5500190

- 15 amp with switch



Leviton Datacom Surge Suppressors

- LV-5350BNC
- BNC interface
- LV-5350PC
- F-coax
- LV-5350PT4
- 2-line Telco
- LV-5350PT8
- 4-line Telco



Leviton Surge Strips LV-5300PS

- 6 outlet
- LV-5300PST
- With Telco protection
- LV-5300PSC
- With cox
- LV-05300IPS
- Metal housing



Leviton Modular Surge Strips LV-05950SSG

- 9 outlets
- Provided with 2 line tele
- Provided with dual coax protection
- Also available with ethernet & DSL modules



Leviton Surge Receptacles LV-05280

- 15 amp in variety of colors
- LV-08280
- Hospital Grade with audible alarm
- LV-05280IG
- Isolated ground
- Matching wallplate included



JVI Digital Satellite Meter YN-10SNGLCPR

- All new Digital Satellite Meter
- Positive Satellite identification
- Will ID all VSAT, DishPro and DirecTV Multi-Sat systems
- Fully upgradeable software



Inovonics In Touch Pak IV-FA2603R

- 900 MHz
- Includes the IV-FA404R4 transmitter receiver with relays and the IV-FA203 pendant
- Full supervision
- 2 year warranty



ADEMCO Self-Contained Security System LYNXRSP

- Full voice response - **Now in Spanish!**
- 24 wireless and 1 hardwired zone
- Single button operation
- Family message center w/built-in microphone
- Supports remote phone control
- Crystal clear LCD display



GE Security CareGard PERS System SR-8073703

- Suited for any applications where 24/7 Emergency Response is required
- Integrated 2-way Voice Standard
- Neighbor Call with instant 2-way
- 24 wireless zones
- Medication reminders
- No-activity monitoring
- Optional X-10 support for medication & activity reminders

- Supports sensors for activity detection, life safety and environmental monitoring
- Package includes wrist watch panic sensor
- Optional wall mount bracket available



Visonic PowerCode Supervised Wireless Flood Detector VS-MCT550

- Used to detect the presence of water
- Compatible with the PowerMax Wireless Control Panel, VS-MCR304 & VS-MCR308 wireless receivers



Visonic

PowerMax Wireless Security System Kit

VS-PWRMAXW

VS-PWRMAXB

- Ivory or charcoal console finish available

Kit includes:

* Powermax Unit

(Controller, receiver, sounder and keypad with full features)

* (2) VS-MCT302 mini magnetic contacts

* (1) VS-K940MCW wireless 40 lb. pet immune PIR

* (1) VS-MCT234 - 4-button keyfob

• PowerMax features:

- 3 29 wireless zones
- 3 1 hardwire zone
- 3 2-way voice
- 3 Remote telephone control
- 3 Paperless, easy device enrollment
- 3 RS-232 or modem up/downloading
- 3 Rechargeable batteries for control panel
- 3 Lithium batteries for transmitters
- 3 Compatible with all PowerCode™ transmitters
- 3 Message Center
- 3 X-10 Lighting Control
- 3 Voice Dialer



Visonic
For a smart and secure lifestyle

Visonic

PowerMax+ Wireless Security System Kit

VS-PMPLS1

- Panel, (2) mag contacts, (1) pet immune PIR, keyfob

VS-PMPLS2

- Panel, (2) mag contacts, (2) pet immune PIR

VS-PMPLS3

- Panel, (2) mag contacts, (2) pet immune PIR, keyfob

VS-PMPLS4


- Panel, (3) mag contacts, (1) pet immune PIR, keyfob

VS-PMPLS5

- Panel, (3) mag contacts, (2) pet immune PIR, keyfob

• PowerMax+ features:

- * 28 wireless zones
- * 2 hardwire zones
- * Scheduler function
- * On-board/Automated PGM output
- * Optional wireless siren (VS-MCS700)
- * On-board power for hardwire devices
- * Reporting to up to 4 private phone numbers
- * LCD display for easy programming & use
- * Built-in wireless diagnostics for signal testing
- * Add up to 8 wireless keypads & 8 keyfobs without using any of the 28 wireless zones
- * Optional GSM adaptor with SMS coming soon!
- * Optional Internet connectivity coming soon!
- * Built-in Message Center
- * Up to 15 X-10™ outputs
- * Timed Auto Arming

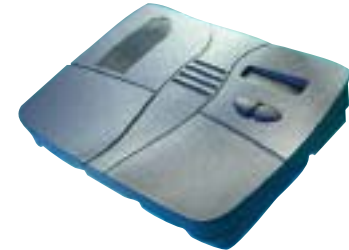

Visonic
For a smart and secure lifestyle

Linear

DVS Control Communicators

LN-DVS1200

- 12-zone Console Communicator

LN-DVS2400

- 24-zone Console Communicator

- Quick-learn programming
- Remote access via LN-RA2400 software
- Factory default settings ease programming
- Plug-in voice prompt, telephone access, optional 2-way voice board (LN-VB2)
- Built-in speaker with alarm tones
- Consoles can be flush or surface mounted
- Contact ID and 4 x 2 formats
- Works with all DX & DXS transmitters



Linear

Linear

Personal Emergency Reporting System

LN-PERS2400A

- Installs in minutes
- Compatible with DXT and DXS transmitters
- Emergency, fire and inactivity reports
- Optional plug-in LN-VB4 two-way voice board
- UL Listed per UL 1637



Linear

ADEMCO

Self-Contained Security System

LYNXR-EN

LYNXRPK-EN

- Designed for a quick install, the Lynx is a control panel, keypad, siren and dialer in one sleek unit that supports all 5800 wireless devices & sensors
- Pack includes:
 - (2) 5816
 - (1) 5890PI and X-10 interface



LYNXR-EN features include:

- * Integrated 2-way voice
- * Supports remote phone access
- * Speaker phone & enhanced message center
- * 24 wireless zones of protection; 1 hardwired zone loop
- * Voice response for programming and operation
- * 85dB internal siren built-in
- * "Follow Me" features
- * Paging capabilities for openings & closings
- * 84 event log * Scheduling
- * Lack of usage notification
- * Fully downloadable
- * 10-digit account number
- * Supports RF encrypted devices

Honeywell

ADEMCO

3/4" Recessed Window/Door Transmitter

5818MN

- 3/4" diameter x 3" long
- 3/8" diameter magnet included
- User replaceable "AAA" battery



Honeywell

ADEMCO

Slim Line Window/Door Transmitter

5820

- Small compact design
- Magnet and mounting hardware included
- User replaceable "AAA" battery



Honeywell

ADEMCO

Slim Line Door/Window Transmitter

5816MN

- Compact professional design
- 2-zones for protection
- External contact loop
- 2 internal reed switches for vertical or horizontal mounting
- Uses long life user replaceable lithium batteries



Honeywell

ADEMCO Mini 2-Point Transmitter 5816

- Tamper
- NC capabilities
- Built-in reed contact
- External contact loop

5816BR

- Brown case (3 pack)

5899

- Extra magnets & spacers (4 pack)



Honeywell

ADEMCO Recessed Door Transmitter 5818

- Tapered cylinder
- 3V battery included
- Magnet & hole cover



Honeywell

ADEMCO Shock Processor & Transmitter 5819

- 3 zones for total protection
- Closed loop shock sensing/processing
- External contact loop
- Built-in reed switch for vertical or horizontal mounting
- Adjustable pulse count & response sensitivity settings



Honeywell

ADEMCO Wireless Recessed Transmitter 5800MICRA

- Compatible with all 5800 Wireless devices
- Replaceable Lithium coin cell battery
- Dimensions: 0.75" dia. x 0.33" depth



Honeywell

ADEMCO Wireless Shock Sensor 5800SS1

- Mounts directly to glass surface
- Perfect fit for kitchens, bathrooms, skylights and occupied areas
- Compatible with all 5800 Wireless systems
- Simple setup reduces false alarms



Honeywell

ADEMCO 5800 Wave Wireless Siren 5800WAVE

- No wires to run, quick to install
- Installs directly to any standard duplex AC adaptor
- Includes a back up battery for an added level of protection



Honeywell

ADEMCO Ultra Small Door/Window Transmitter 5814

- Extremely compact
- Features a built-in reed switch and tamper
- Includes a fully supervised replaceable battery and transmissions
- Dimensions: 1.5" H x 1.1" W x .30" D



Honeywell

ADEMCO 3-Point Transmitter 5817

- NO or NC capabilities
- Built-in reed contacts
- Tamper
- Includes battery



Honeywell

ADEMCO Temperature Sensor and Flood Detector 5821

- Five selectable temperature ranges to choose from
- Monitors cold temperature & flood detection simultaneously
- Local or remote temperature probe



Honeywell

ADEMCO Commercial Wireless Contact Monitor Device 5817CB

- Makes any contact device UL Commercial wireless burg or fire
- Requires 5881ENHC receiver for UL Commercial wireless burg or fire
- Compatible with all Vista control panels



Honeywell

ADEMCO Door/Window Transmitter 5815

- New sleek design
- Longer battery life
- Includes magnet in the box



Honeywell

ADEMCO Commercial Wireless Hold-Up Button 5869

- Save on labor & installation materials
- Requires 5881ENHC Receiver for UL Commercial wireless burg or fire applications
- Compatible with all Vista control panels



Honeywell

ADEMCO Personal Panic 5802MN

- Miniature design
- Replaceable battery
- Belt clip and necklace included



Honeywell

ADEMCO 4-Button Transmitter 5801

- 4-button transmitter
- Programmable functions
- (1) 3V Duracell battery included



Honeywell

ADEMCO Keypad 5827

- Handheld or wall mounted
- System control capability
- Raised dome keys & LED
- No. 5634 belt clip available
- (1) 9 volt Duracell battery incl.



4-Button Transmitter 5801

- 4-button transmitter
- Programmable functions
- (1) 3V Duracell battery incl.



Honeywell

ADEMCO 4-Button Wireless Key 5804

- 4 programmable buttons
- User replaceable, long life battery
- Contemporary styling

5804E

- New high security mode, rolling code encryption (5881EN receiver required)
- Has 5804 features



Honeywell

ADEMCO 2-Button Key 5804-2

- 2 programmable buttons
- Simple operation
- User replaceable, long life batteries
- Compact, contemporary styling



Honeywell

ADEMCO Bi-Directional Key 5804BD

- Operates security system, lights & appliances
- Audible and visual status
- 4 programmable buttons
- 2 button panic

Also avail.: 5804BD-PK



Honeywell

ADEMCO Wireless Repeater 5800RP

- Extends the range of 5800 wireless devices
- UL Listed for residential burg
- Saves a wire run to a secondary receiver at a remote location



Honeywell

ADEMCO Bi-Directional 4-Button Key 5804BDV

- Operates security system, lights & appliances
- Voice & visual system status report
- High security mode, rolling code encryption
- 4 prog. buttons - 2 button panic
- User replaceable, long life batteries



Honeywell

Inovonics Frequency Agile™ FA-210 Series Universal Transmitters IV-FA210

- 900 MHz
- Reduced size transmitters
- High power transmitter available
- Door/window transmitter
- 2 year warranty



INOVONICS
WIRELESS CORPORATION

SECO-LARM® ENFORCER® Handheld Transmitters SL-SK919TP1H

- 1-button, 1-channel

SL-SK919TP2H

- 2-button, 3-channel

- Up to 500 ft. range
- Visor & belt clip included
- Optional belt-clip holster
- Large easy-to-press buttons
- Works with all SECO-LARM receivers



SECO-LARM®

SECO-LARM® ENFORCER® Pendant Transmitters SL-SK919TD1S

- 1-button, 1-channel

SL-919TD2AUP

- 2-button, 3-channel

- Up to 500 ft. range
- Works with all SECO-LARM receivers
- Over 68 billion possible codes
- Available with CodeBump™ Rolling Codes (18 quintillion possible codes)



SECO-LARM®

Inovonics Frequency Agile™ Beltclip Transmitter IV-FA205DBK

- 900 MHz
- Double button belt clip/loop transmitter
- 1 of 8 pendants offered by Inovonics
- Easy mounting for fixed position signaling
- Full supervision
- 2 year warranty



INOVONICS
WIRELESS CORPORATION

Visonic 12-Bit Wireless Transmitters

VS-WT101

- 1-ch. handheld transmitter

VS-WT102

- 2-ch. handheld transmitter

VS-WT104

- 4-ch. handheld transmitter

VS-WT201

- Pendant transmitter

VS-WT201WP

- Waterproof pendant transmitter

VS-WT211

- Wristband transmitter

VS-WT301

- Magnetic contact transmitter



Visonic
For a smart and secure lifestyle

Inovonics Frequency Agile™ Wireless Billtrap IV-FA209

- 900 MHz
- Instant or delayed transmission
- Thin (1/2" thick profile)
- Full supervision
- 2 year warranty



INOVONICS
WIRELESS CORPORATION

Visonic PowerCode Supervised Transmitters

*All compatible with PowerMax+ and PowerMax Wireless control panels, VS-MCR304 and VS-MCR308 receivers.

VS-MCT100

- Universal transmitter

VS-MCT101

- 1-button handheld transmitter

VS-MCT102

- 2-button handheld transmitter

VS-MCT104

- 4-button handheld transmitter

VS-MCT211

- Waterproof Wristband transmitter

VS-MCT201WP

- Waterproof pendant transmitter

VS-MCT234

- 4-button keyfob transmitter

VS-MCT302

- Mini magnetic contact



Visonic
For a smart and secure lifestyle

GE Security Wireless Products

CA-NX450

- Door/window transmitter (white)

CA-NX470

- 4-button keyfob

CA-NX495

- With heat sensor



GE

Linear DXS Supervised Transmitters

Supervised Handheld Transmitters

- LN-DXS21
 - 2-button, 1-channel
- LN-DXS23
 - 3-button, 4-channel
- LN-DXS25
 - 5-button, 8-channel



- Compatible with LN-DXR, LN-DXSR, LN-DVS & LN-PERS receivers
- Over 1 million factory preset codes
- Transmits alarm, status and low battery

Supervised Waterproof Transmitters

- LN-DXS62
 - 1-button, 1-channel
 - Pendant or wristwatch app.
- LN-DXS63
 - 2-button, 1-channel
 - Pendant or wristwatch app.



Supervised Stationary Transmitters

- LN-DXS31
 - Door/window w/magnet
- LN-DXS32
 - Mini door/window with magnet
- LN-DXS54
 - PIR motion detector
- LN-DXS72
 - Photoelectric smoke detector
- LN-DXS81
 - Supervised bill trap
- LN-DXS91
 - Glassbreak detector



Linear.

Linear DXT-Series Transmitters

Handheld Transmitters

- LN-DXT21
 - 2-button, 1-channel
- LN-DXT23
 - 3-button, 4-channel
- LN-DXT25
 - 5-button, 8-channel



Mini Transmitters

- LN-DXT41
 - 1-button, 1-channel
- LN-DXT42
 - 2-button, 3-channel
- LN-DXT61A
 - Pendant transmitter



Stationary Transmitters

- LN-DXT31
 - Door/window with magnet
- LN-DXT54
 - Passive Infrared motion sensor
- LN-DXT72
 - Photoelectric smoke detector
- LN-DXT81
 - Bill trap



Linear.

Linear Stationary Mid-Range Transmitter

- LN-XT1
 - 1-channel model
- LN-XT4
 - 4-channel model
- Accepts N/O or N/C inputs
- Complete RF Supervision Field Enabled
- Up to 10 miles of Line-of-Site Range
- Compatible with Linear's XR Series of 27MHz mid-range receivers
- Antenna not included



Linear.

Linear Handheld Mid-Range Transmitters

- LN-XT1H
 - 1-channel model
- LN-XT2H
 - 2-channel model
- LN-XT4H
 - 4-channel model
- Complete RF Supervision Field Enabled
- Up to 2 miles of Line-of-Site Range
- Compatible with Linear's XR Series of 27MHz mid-range receivers



Linear.

ADEMCO Dual Button Personal Panic 5802MN2

- Fully supervised wireless emergency transmitter that sends alarm signal to the control receiver by pressing both buttons
- Easy to use and reduces false alarms
- Includes a belt-clip, necklace and a long-life, user replaceable battery



Honeywell

Street Smart 6-Button Wireless Wall Transmitter WT400

- 6-button wall mounted transmitter
- Can be learned into Code Encryptor LX2, RF Lamp Module, Relay Module & Wireless Automator
- Sends RF signal directly to compatible receivers
- Integrated LED provides transmission indication
- Super thin, attaches directly to wall with tape or screws



Honeywell

Street Smart Extra Remotes CEREM

- Extra remote for Code Encryptors 2
- Keychain size 3-button remote for arm/disarm, garage door & panic



Honeywell

- Also available: CEREM1**
- Works with Code Encryptor 2 and WEL

ADEMCO Portable Panic Pendant 5802 5802CP

- 5802 necklace (shown) & 5802CP belt clip
- "Press & Hold" avoids accidental alarms
- Single button action



Honeywell

Street Smart Wireless Automator WA6R

- Kit contains receiver with 6 programmable Form C relays, 4-button remote & transformer
- * Control up to 6 devices that can be manipulated by relay
- * 4 billion encrypted codes allows you to control any device without giving up security
- * Each relay has multiple options (see chart)
- * Add up to 7 remotes to 1 receiver



Extra remote: CEREMWA

Honeywell

Street Smart RF Lamp Module LT400

- Works with all Code Encryptor LX2 remotes
- LT300
 - Works with 5804, 5804BD, 5804BVD
- Built-in RF receiver
- Up to 100 ft. of range
- Add up to 7 remotes per lamp module
- Simple push button programming



Honeywell

Street Smart 1-Button Receiver & Remote Kit WEL-Y

- Works with all Ademco, DSC & Moose panels
- WEL-R
- Works with all FBII, Caddx NX & Napco panels
- Provides either Police or Medical Panic through data bus or relay output
- Delay or instant activation
- Water resistant



Honeywell

Street Smart Code Encryptor LX2 CE2Y-LX2

- Works with all Ademco, DSC and Moose panels
- CE2R-LX2
- Works with all FBII, Caddx NX & Napco panels
- Kit contains receiver, 2 remotes & LED status light
- Data bus compatible, self programming using NO ZONES
- 2 on-board relays for added garage door, lighting control, etc.
- Holds up to 7 remotes per receiver



Honeywell

Street Smart Encryptor LX2 Remote CEREMLXH

- Black
- CEREMLX
- White
- Extra remote for Code Encryptors LX2
- Keychain size 4-button remote for arm/disarm, garage door & 2-button panic
- 4 billion rotating codes



Honeywell

Street Smart Code Encryptor II CE2Y-2

- Works with all Ademco, DSC, Napco 1000 Series, Moose (MP-Z700, MP-880, MP-900 & MP-ZX200, MP-400, MP-1100) and Caddx (CA-8980E & CA-8600E) panels
- CE2R-2
- Works with all FBII, Caddx (CA-NX4, CA-NX6, CA-NX8) and Napco panels



Honeywell

ADEMCO Wireless Transmitter Module 5883H

- Receiver and 5800TM system transmitter built-in
- Reduces time and labor by using only one set of wires
- Compatible with all Vista residential panels



Honeywell

Apex Wireless Receiver XP-WL500M

- 16-zone wireless receiver with bridge
- A "must have" for interfacing the Destiny-6100 with Ademco 5800 Series wireless products



Honeywell

Apex Wireless Receiver XP-WL500H

- 80-zone wireless receiver with bridge
- A "must have" for interfacing the Destiny-6100 with Ademco 5800 Series wireless products



Honeywell

ADEMCO 5800 Wireless Labor Saver Kits 58LSAVR1-KT

- Includes:
- * (1) 5881LEN receiver
- * (2) 5816 transmitter

58LSAVR2-KT

- Includes:
- * (1) 5881LEN receiver
- * (1) 5816 transmitter
- * (1) 5890 motion detector

58LSAVR3-KT

- Includes:
- * (1) 5881MEN receiver
- * (3) 5816 transmitters
- * (1) 5890 motion detector
- * (1) 5804 wireless key



Honeywell

F.B.I.I. OMNI Wireless Receiver FB-ZR401

- Unlimited zone receiver
- Compatible with 500 wireless devices (non-bi-directional)
- Compatible with OMNI Series Attack Packs



Honeywell

ADEMCO 5881 Series Wireless Receiver

- 5881ENL
- 5881ENM
- 5881ENH
- Supports wireless devices:
- * 5881ENL - 8 devices
- * 5881ENM - 16 devices
- * 5881ENH - 64 devices depending on control
- New high security mode, rolling code encryption
- Connects to console interface wires
- Longer range, dual antennas



Honeywell

ADEMCO Commercial Wireless Receiver 5881ENHC

- Industry's first Commercial/Burg/Fire wireless receiver
- Compatible with all Vista control panels



Honeywell

Visonic 12-Bit Wireless Receivers

VS-WR200

- Single channel receiver

VS-WR2002B

- 2-channel receiver

VS-WR2004B

- 4-channel receiver

- NO/NC outputs



Visonic
For a smart and secure lifestyle

Visonic PowerCode Supervised Pet Immune Wireless Detectors

VS-K940MCW

- Wireless pet immune PIR (up to 40lb. immunity)

VS-K980MCW

- Wireless pet immune PIR (up to 80lb. immunity)
- Compatible with PowerMax+ and PowerMax Wireless control panels, VS-MCR304 and VS-MCR308 receivers



Visonic
For a smart and secure lifestyle

Visonic PowerCode Supervised Receivers

VS-MCR304

- Single channel receiver

VS-MCR308

- 4-channel receiver

VS-MCX8

- 8-zone expander



Visonic
For a smart and secure lifestyle

GE Security Wireless Products

CA-NX408E

- 8-zone wireless receiver

CA-NX416E

- 16-zone wireless receiver

CA-NX448E

- 48-zone wireless receiver



SECO-LARM® ENFORCER® Wireless Receivers

SL-SK910R

- 1-channel

SL-SK910R2

- 2-channel

SL-SK910R4

- 4-channel

- 11 to 24 VAC/VDC, 10A Form C relays
- Learn 15 tx/channel, extended range antenna avail.
- Field programmable output modes
- Works with all SECO-LARM transmitters



SECO-LARM®

Linear Add-On Receivers

LN-DXR701

- 1-channel

LN-DXR702

- 2-channel

- 32 transmitter capacity
- Quick learn programming
- RF activity indicator
- Field selectable output modes
- Form "C" relay output(s)



Linear

Inovonics Frequency Agile™ FA-401/404 Family Receivers

IV-FA401

- 900 MHz
- Single or four transmitter receivers
- Fully supervised
- Available with or without relays
- 2 year warranty



INOVONICS®
WIRELESS CORPORATION

Inovonics Frequency Agile™ FA-416 Family Receivers

IV-FA416

IV-FA416D

- Add 900 MHz to any hardware panel
- Available with or without relays
- Available with or without display
- Add up to 16 fully supervised transmitters
- Case tamper
- 2 year warranty



INOVONICS®
WIRELESS CORPORATION

Linear Supervised Add-On Radio Receivers

LN-DXSR1504

- 4-channel

LN-DXSR1508

- 8-channel

- Selectable channel supervision
- Selectable outputs per channel
- Dual diversity superhet technology
- Quick-learn programming
- Individual outputs per channel



Linear

Inovonics Frequency Agile™ FA-464-DR Receiver

IV-FA464DR

- Add 64 fully supervised transmitters
- LED display for quick status
- Each output provides Form C relay
- 2 year warranty



INOVONICS®
WIRELESS CORPORATION

Inovonics Frequency Agile™ PIR Sensor

IV-FA206I

- 900 MHz
- PIR motion sensor
- One of 3 PIR's offered by Inovonics
- PIRs for commercial or residential applications available
- 2 year warranty



INOVONICS®
WIRELESS CORPORATION



**Looking to save money?
Watch for ADI's
monthly sales promotions!**

ADEMCO PIR Motion Sensor

5890

- 40'x 56' pattern
- Interchangeable lenses
- Tamper protection
- Includes two 3V long life lithium batteries
- Optional lenses:
*199LLR - Long range lens 60'x 60'
*199PA - Pet Alley lens 40'x 56'



Honeywell

ADEMCO Wireless Pet Immune Motion Sensor

5890PI

- 35' x 45' pattern
- Pet immune to 40lbs.
- Tamper protection
- Split zone optics
- Includes two 3V long life lithium batteries



Honeywell

ADEMCO Wireless English Keypad

5839

- No wires to run reducing installation & labor cost
- Compatible with LYNX & LXL
- Compatible with VISTA using 5883H
- Optional AC adapter for "Always On" operation
- Includes a 9V battery



Honeywell

IntelliSense FLEXGUARD® Wireless Glassbreak Detector CK-FGW1525T

- FlexCore™ signal processor
- Adjustable sensitivity to match room acoustics
- Use with all major brand wireless transmitters
- Tampered version available: CK-FGW1525T
- 5 year warranty



Honeywell

ADEMCO Wireless Pet Immune PIR 5894PI

- 35' x 45' coverage
- Pet immune up to 80 lbs.
- Uniform sensitivity optics
- Temperature compensation
- EZ opening cover
- 3 sensitivity settings
- Up to 10 year battery life



 **Honeywell**

ADEMCO Wireless DUAL TEC Motion 5897-35

- 35' x 30' pattern
- Automatic walk test
- Optional pet alley and barrier lens included
- Temperature compensation
- Adjustable microwave



 **Honeywell**

Visonic PowerCode Supervised Keypad Commander VS-MCM140

- Wireless Keypad Commander for use with PowerMax
- Compatible with PowerMax+ and PowerMax wireless control panels, VS-MCR304 and VS-MCR308 receivers.



 **Visonic**
For a smart and secure lifestyle

ADEMCO Wireless Keypad 5827

- Handheld or wall mounted
- System control capability
- Raised dome keys & LED
- No. 5634 belt clip available
- (1) 9 volt Duracell battery included



Honeywell

ADEMCO Bi-Directional Keypad 5827BD

- Back-lit keys - 2-way feedback
- 5700 & 5800 Series compatible
- Performs most traditional keypad functions



Bi-Directional Keypad Pack 5827BD-PK

- Includes 5827BD and 5800TM

Honeywell

Inovonics Frequency Agile™ High Power Repeater IV-FA575

- Up to 4 miles of open field range
- Enhances transmission range
- Great for large site coverage
- Available without housing
- 2 year warranty



 **INOVONICS®**
WIRELESS CORPORATION

Visonic PanicPack Personal Emergency Response System VS-PANICPACK

- Turn any alarm panel into a Personal Emergency Response System
- Each Panic Pack contains:
 - * (1) VS-WR200 wireless receiver
 - * (1) VS-WT101 handheld transmitter
 - * (1) VS-WT201WP waterproof pendant transmitter
- Enables addition of a panic alarm to an open zone on any hardwire panel



 **Visonic**
For a smart and secure lifestyle

GE Security PinPoint Addressable 4140 4 Input/Output Device SR-4140ID

- Supports 4 inputs and 4 unsupervised devices
- Interfaces with SR-NX2192



GE Security Expander Modules CA-NX216 CA-NX216E CA-NX495

- Hardwire zone expander
- 16-zone expansion module
- With heat sensor



GE Security PinPoint Addressable Single Input Device SR-SIID

- Supports single non-addressable device
- Utilizes advanced digital data communication
- Connects to SR-NX2192 interface



ADEMCO Wireless Labor Saver Kits 6150RF-KT2 6150RFLSVR1 6150RFLSVR2 6150RFLSVR3

- Includes:

- * 6150RF keypad/receiver
- * 5804 four button key
- * 5816 door/window transmitter
- * 5890 motion detector
- * 6150RF-KT2 has (1) 5804BD 4-button key with status feedback

	KT1	KT2	LSVR1	LSVR2	LSVR3
1	1	1	1	1	1
1	1*	-	-	-	-
-	-	2	1	2	-
-	-	-	1	1	-

- Convenient 4-wire run from the control
- Quick & easy installation of peripheral devices
- Huge selection of peripherals; customize and upgrade with total flexibility
- Long life batteries are easily replaceable
- Long operating range; unparalleled reliability
- BIG SAVINGS - compared to component cost



Honeywell

IntelliSense FLEXGUARD® Wireless Glassbreak Detector CK-FGW1525T

- FlexCore™ signal processor
- Adjustable sensitivity to match room acoustics
- Use with all major brand wireless transmitters
- Tampered version available: CK-FGW1525T
- 5 year warranty



Honeywell

ADEMCO Wireless Keypad 5827

- Handheld or wall mounted
- System control capability
- Raised dome keys & LED
- No. 5634 belt clip available
- (1) 9 volt Duracell battery included



Honeywell

ADEMCO Bi-Directional Keypad 5827BD

- Back-lit keys - 2-way feedback
- 5700 & 5800 Series compatible
- Performs most traditional keypad functions



Bi-Directional Keypad Pack 5827BD-PK

- Includes 5827BD and 5800TM

Honeywell

Visonic PanicPack Personal Emergency Response System VS-PANICPACK

- Turn any alarm panel into a Personal Emergency Response System
- Each Panic Pack contains:
 - *(1) VS-WR200 wireless receiver
 - *(1) VS-WT101 handheld transmitter
 - *(1) VS-WT201WP waterproof pendant transmitter
- Enables addition of a panic alarm to an open zone on any hardwire panel



Visonic
For a smart and secure lifestyle

Visonic PowerCode Supervised Keypad Commander VS-MCM140

- Wireless Keypad Commander for use with PowerMax
- Compatible with PowerMax+ and PowerMax wireless control panels, VS-MCR304 and VS-MCR308 receivers.



Visonic
For a smart and secure lifestyle

ADEMCO Wireless Labor Saver Kits

6150RF-KT2
6150RFLSVR1
6150RFLSVR2
6150RFLSVR3

- Convenient 4-wire run from the control
- Quick & easy installation of peripheral devices
- Huge selection of peripherals; customize and upgrade with total flexibility
- Long life batteries are easily replaceable
- Long operating range; unparalleled reliability
- **BIG SAVINGS** - compared to component cost

Includes:	KT1	KT2	LSVR1	LSVR2	LSVR3
* 6150RF keypad/receiver	1	1	1	1	1
* 5804 four button key	1	1*	-	-	-
* 5816 door/window transmitter	-	-	2	1	2
* 5890 motion detector	-	-	-	1	1
* 6150RF-KT2 has (1) 5804BD 4-button key with status feedback					



Honeywell

GE Security Expander Modules

- CA-NX216
- Hardwire zone expander
- CA-NX216E
- 16-zone expansion module
- CA-NX495
- With heat sensor



GE Security PinPoint Addressable 4I40 4 Input/Output Device SR-4I40ID

- Supports 4 inputs and 4 unsupervised devices
- Interfaces with SR-NX2192



GE Security PinPoint Addressable Single Input Device SR-SIID

- Supports single non-addressable device
- Utilizes advanced digital data communication
- Connects to SR-NX2192 interface




Inovonics Frequency Agile™ High Power Repeater IV-FA575

- Up to 4 miles of open field range
- Enhances transmission range
- Great for large site coverage
- Available without housing
- 2 year warranty



INOVONICS
WIRELESS CORPORATION

Need help finding your way through a maze of Systems challenges?

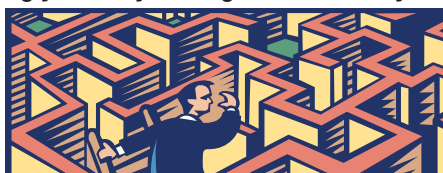

**Let ADI's Systems Sales & Support Team get you going in the right direction.
Call: 1-800-234-7971 (ADI-SYS1)**